
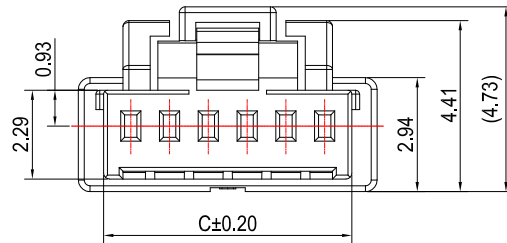


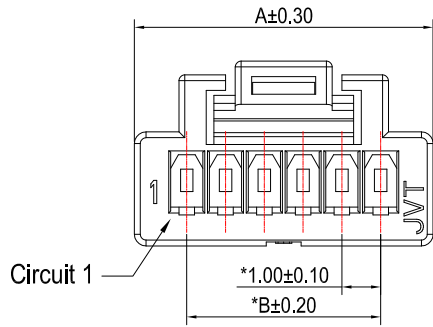



RoHS



ASPECIFICATIONS :

- Voltage Rating:50V AC/DC
- Current Rating:1A AC/DC
- Withstanding Voltage:250V AC/minute
- Temperature Range:-40℃~+105℃
- Insulation Resistance:100MΩ Min.
- Contact Resistance:Initial:20 milliohms Max.  
After Test:40 milliohms Max.
- Suitable JVT1005T series Terminal  
JVT1005W series Wafer

Material:

Material:PA66 UL 94V-0  
Color:Natural/Black color  
Packing specifications:

06~10P 2000pcs/bag  
11~15P 1000pcs/bag

- \*is the key control size

JVT1005HNO-XXXXL  
Logo  
Series NO.  
Housing  
N0-PA66 UL94V-0  
L-Lock  
Blank-Natural colr  
BK-Black  
Pin NO.

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
6	7.70	5.00	6.40	11	12.70	10.00	11.40
7	8.70	6.00	7.40	12	13.70	11.00	12.40
8	9.70	7.00	8.40	13	14.70	12.00	13.40
9	10.70	8.00	9.40	14	15.70	13.00	14.40
10	11.70	9.00	10.40	15	16.70	14.00	15.40

Version		Content of change		Date	Signature	GENERAL TOLERANCE 0 ±0.35 .0 ±0.30 .00 ±0.20 .000 ±0.10			<b>JVT</b> 乔业连接器 <b>JVT CONNECTORS</b> CONNECTORS			Unit	mm	Scale	1:1	Date	20210922	Approved by	LI	Check	CLYDE	Design	YANG	Standard	1.0mm HSG
A		B		C		D			E			F			G			H							
															P/N JVT1005HNO-XXXXL Map title 031 Version A0										