
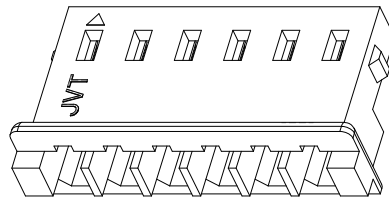





RoHS

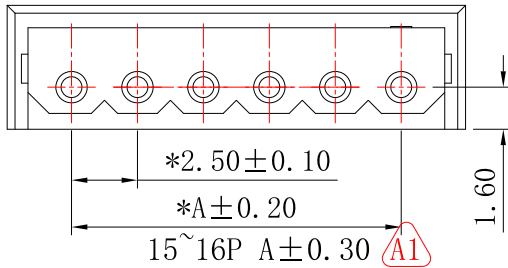


- SPECIFICATIONS :
- Voltage Rating: 250V AC / DC
 - Current Rating: 3A AC / DC
 - Withstanding Voltage: 1000V AC/minute
 - Temperature Range: -40°C~+105°C
 - Insulation Resistance: 1000MΩ Min.
 - Contact Resistance: 20mΩ Max.
 - Suitable JVT1135T series Terminal
JVT1136W series Wafer

■ Material:
Material: PA66 UL 94V-0
Color:natural color/Beige

■ Packing specifications:
whole series 1,000 pcs/bag
*is the key control size

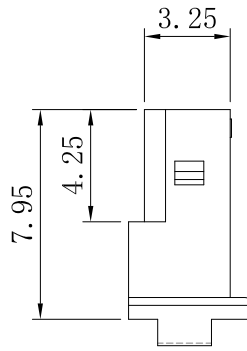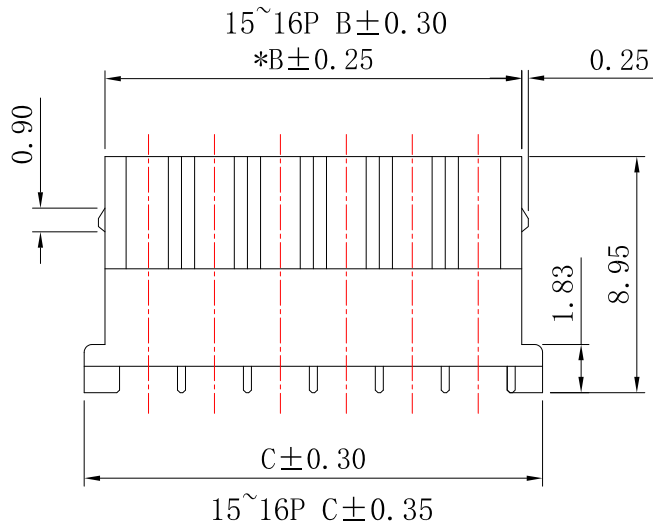

JVT1135HN0-XXXX
Logo
Series NO.
Housing
PA66 UL94V-0
BE-Beige
Blank-natural
color
Pin NO.

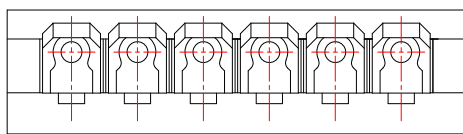

PIN	DIM. (mm)		
	A	B	C
02	2.50	5.90	7.50
03	5.00	8.40	10.00
04	7.50	10.90	12.50
05	10.00	13.40	15.00
06	12.50	15.90	17.50
07	15.00	18.40	20.00
08	17.50	20.90	22.50
09	20.00	23.40	25.00
10	22.50	25.90	27.50
11	25.00	28.40	30.00
12	27.50	30.90	32.50
13	30.00	33.40	35.00
14	32.50	35.90	37.50
15	35.00	38.40	40.00
16	37.50	40.90	42.50

				GENERAL TOLERANCE		JVT 乔业连接器 JVT CONNECTORS		Approved by	Check	Design	Standard	2.5mm HSG			
A1	15~16P 修正A尺寸公差	20230222	CLYDE	0 ±0.35	0.0 ±0.30	LI	CLYDE	LU	P/N	JVT1135HN0-XXXX					
Version	Content of change	Date	Signature	.00 ±0.20	.000 ±0.10	Unit	mm	Scale	1:1	Date	2022 02 22	Map title	031	Version	A1