
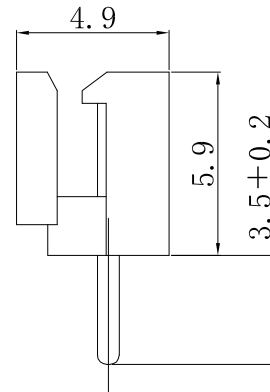
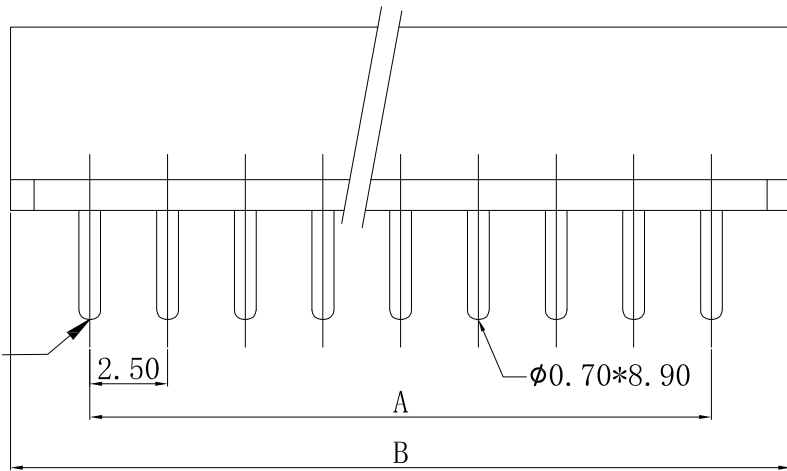


RoHS

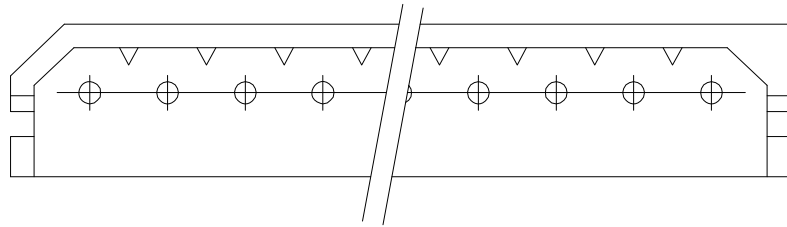

■ SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C

■ WAFER

- Material: Base: Nylon 66 UL94V-2
pin: Brass Tin-plated

JVT1136WN2-XXSN-D
 Logo Series NO. Wafer PA66 UL94V-2
 DIP SN-Tin Plated Pin NO.

Circuit 1

2.50

A

B

∅0.70*8.90

2.50±0.10

∅0.85±0.05

P. C. B LAYOUT



Poles	Dimensions		Poles	Dimensions	
	A	B		A	B
02	2.50	7.50	11	25.00	30.00
03	5.00	10.00	12	27.50	32.50
04	7.50	12.50	13	30.00	35.00
05	10.00	15.00	14	32.50	37.50
06	12.50	17.50	15	35.00	40.00
07	15.00	20.00	16	37.50	42.50
08	17.50	22.50	17	40.00	45.00
09	20.00	25.00	18	42.50	47.50
10	22.50	27.50			

				GENERAL TOLERANCE		JVT 乔业连接器		Approved by		Check		Design		Standard		2.5mm 180° WAFER	
				0 ±0.35		JVT CONNECTORS		LI		CLYDE		LU		P/N		JVT1136WN2-XXSN-D	
				.0 ±0.30		CONNECTORS		Date		Date		Map title		010		Version A0	
Version		Content of change		Date		Signature		Unit		mm		Scale		1:1		Date 20180517	
A		B		C		D		E		F		G		H			