


RoHS



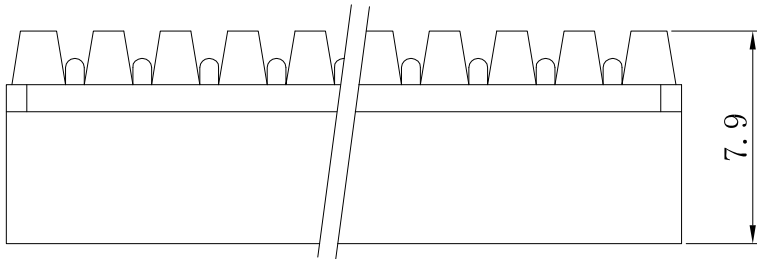


■ SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C


■ WAFER

- Material: Base: Nylon 66 UL94V-2  
pin: Brass Tin-plated/Gold-plated

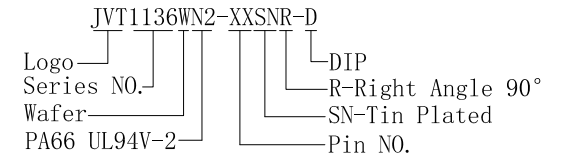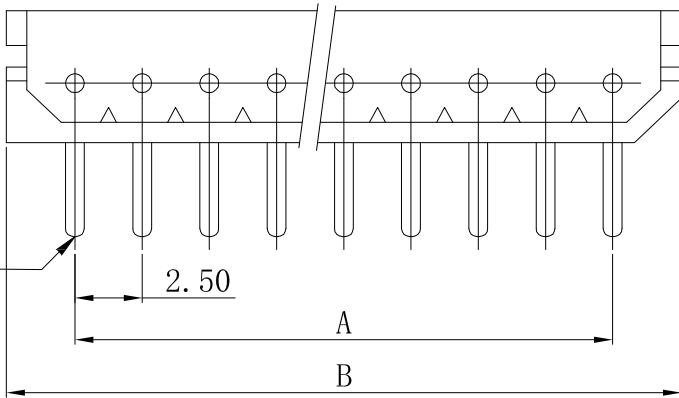

Circuit 1

2.50 ± 0.10

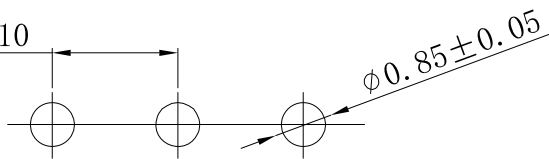

P. C. B LAYOUT



Poles	Dimensions		Poles	Dimensions	
	A	B		A	B
02	2.50	7.50	11	25.00	30.00
03	5.00	10.00	12	27.50	32.50
04	7.50	12.50	13	30.00	35.00
05	10.00	15.00	14	32.50	37.50
06	12.50	17.50	15	35.00	40.00
07	15.00	20.00	16	37.50	42.50
08	17.50	22.50	17	40.00	45.00
09	20.00	25.00	18	42.50	47.50
10	22.50	27.50			

Version		Content of change		Date	Signature	<p>GENERAL TOLERANCE</p> <p>0 ±0.35</p> <p>.0 ±0.30</p> <p>.00 ±0.20</p> <p>.000 ±0.10</p>		<p><b>JVT</b> 乔业连接器</p> <p><b>JVT CONNECTORS</b></p> <p>CONNECTORS</p>			Approved by	Check	Design	Standard	2.5mm 90° WAFER	
						Unit	mm	Scale	1:1	Date	20180517	LI	CLYDE	LU	P/N	JVT1136WN2-XXSNR-D
															Map title	010 Version A0