
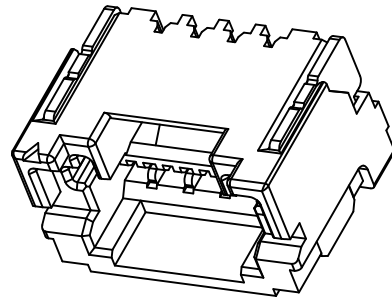


RoHS





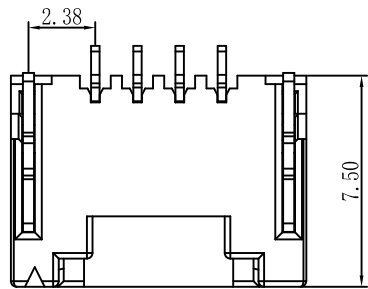


SPECIFICATION

- Voltage rating: 100V AC, DC
- Current Rating: 2A, AC, DC
- Withstand voltage: 500V AC/minute
- Contact resistance: 40mΩ max
- Insulation resistance: 500MΩ min
- Temperature range: -40° C ~ +105° C

WAFER

- Material: PA9T UL94V-0
- Contact area, Brass Tin-plated
- Pin: Phosphor Bronze
- Suitable JVT1504H series Terminal
- JVT1504W series Wafer

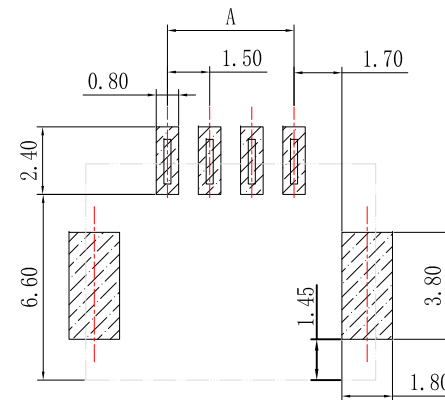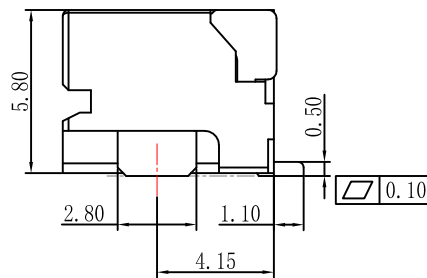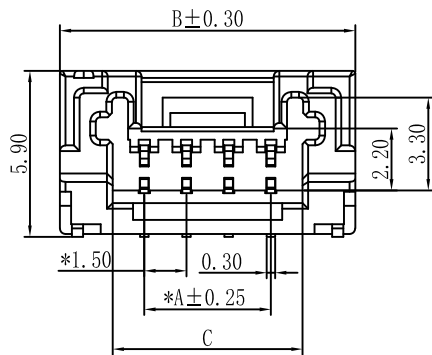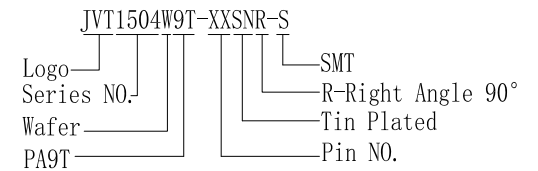

Recommended P.C.B Layout
General Tolerance ±0.05

CKL	DimA	DimB	DimC
02	1.5	7.50	3.75
03	3.0	9.00	5.25
04	4.5	10.50	6.75
05	6.0	12.00	8.25
06	7.5	13.50	9.75
07	9.0	15.00	11.25
08	10.5	16.50	12.75
09	12.0	18.00	14.25
10	13.5	19.50	15.75
11	15.0	21.00	17.25
12	16.5	22.50	18.75
13	18.0	24.00	20.25
14	19.5	25.50	21.75
15	21.0	27.00	23.25
16	22.5	28.50	24.75

Version		Content of change		Date	Signature	<table border="1"> <tr><th colspan="2">GENERAL TOLERANCE</th></tr> <tr><td>0</td><td>±0.35</td></tr> <tr><td>.0</td><td>±0.30</td></tr> <tr><td>.00</td><td>±0.20</td></tr> <tr><td>.000</td><td>±0.10</td></tr> </table>		GENERAL TOLERANCE		0	±0.35	.0	±0.30	.00	±0.20	.000	±0.10	Unit	mm	Scale	1:1	Date	20200629	Approved by	LI	Check	CLYDE	Design	LU	Standard	1.5mm 90° WAFER SMT
GENERAL TOLERANCE																															
0	±0.35																														
.0	±0.30																														
.00	±0.20																														
.000	±0.10																														
<table border="1"> <tr> <td colspan="2">Map title</td> <td colspan="2">JVT1504W9T-XXSNR-S</td> </tr> <tr> <td>031</td> <td>Version</td> <td>A0</td> <td></td> </tr> </table>																		Map title		JVT1504W9T-XXSNR-S		031	Version	A0							
Map title		JVT1504W9T-XXSNR-S																													
031	Version	A0																													