

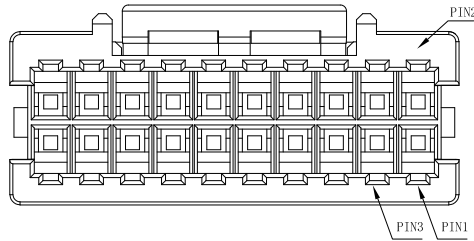

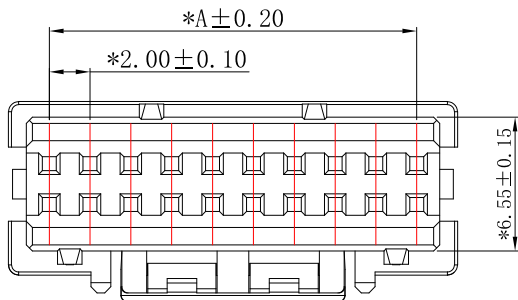


RoHS




(2*08~2*20P 双扣)

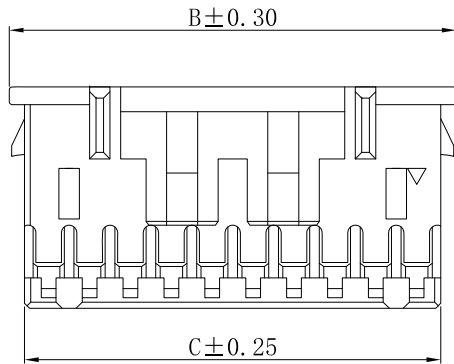


2*02P

2*03P



2*04P



(2*05~2*07P 单扣)

■ SPECIFICATIONS :

- Voltage Rating: 250V AC / DC
- Current Rating: 3A AC / DC
- Withstanding Voltage: 800V AC/minute
- Temperature Range: -40°C~+105°C
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 20mΩ Max.
- *Suitable JVT2038T series Terminal
JVT2038W series Wafer

■ *Material:

Material: PA66 UL 94V-0
Color: Natural

■ Packing specifications:

2*2~2*6P 2,000 pcs/bag
2*7P Above 1,000 pcs/bag

*is the key control size

JVT2038HN0-2*XXL-A
Logo Series NO. Housing Lock Pin NO. PA66 UL94V-0

Poles	DIM			Poles	DIM		
	A	B	C		A	B	C
2*02	2.00	5.0	5.0	2*10	18.00	22.0	20.25
2*03	4.00	7.0	7.0	2*11	20.00	24.0	22.25
2*04	6.00	9.0	9.0	2*12	22.00	26.0	24.25
2*05	8.00	12.0	10.25	2*13	24.00	28.0	26.25
2*06	10.00	14.0	12.25	2*14	26.00	30.0	28.25
2*07	12.00	16.0	14.25	2*15	28.00	32.0	30.25
2*08	14.00	18.0	16.25	2*16	30.00	34.0	32.25
2*09	16.00	20.0	18.25	2*20	38.00	42.0	40.40

Version		Content of change		Date	Signature	<p>GENERAL TOLERANCE</p> <p>0 ±0.35</p> <p>.0 ±0.30</p> <p>.00 ±0.20</p> <p>.000 ±0.10</p>			<p>Unit</p> <p>mm</p> <p>Scale</p> <p>1:1</p> <p>Date</p> <p>20240505</p>			<p>Approved by</p> <p>LI</p>			<p>Check</p> <p>CLYDE</p>			<p>Design</p> <p>LU</p>			<p>Standard</p> <p>P/N</p> <p>Map title</p>			<p>2.0mm HSG Lock</p> <p>JVT2038HN0-2*XXL-A</p> <p>031 Version A0</p>		
---------	--	-------------------	--	------	-----------	--	--	--	---	--	--	------------------------------	--	--	---------------------------	--	--	-------------------------	--	--	---	--	--	---	--	--

