



RoHS



This mark has "or left or right" on the product due to the mold structure.


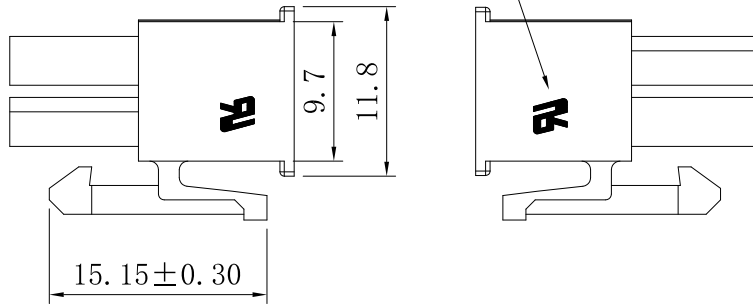


- SPECIFICATIONS :
- Voltage Rating: 600V AC / DC
 - Current Rating: 7A AC / DC
 - Withstanding Voltage: 1500V AC/minute
 - Temperature Range: -40°C~+105°C
 - Insulation Resistance: 1000MΩ Min.
 - Contact Resistance: 20mΩ Max.
 - *Suitable JVT1149T series Terminal JVT1150W series Wafer

■ *Material:
Material: PA66 UL 94V-0/2
Color:Natural color



- Packing specifications:
- 2*1P 2,000 pcs/bag
 - 2*2~2*4P 1,000 pcs/bag
 - 2*5~2*9P 500 pcs/bag
 - 2*10~2*11P 400 pcs/bag
 - 2*12P 300 pcs/bag

*is the key control size

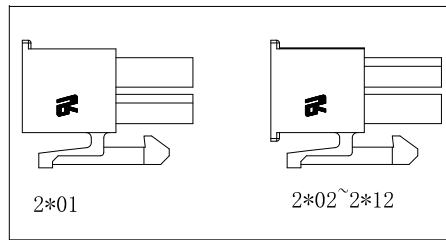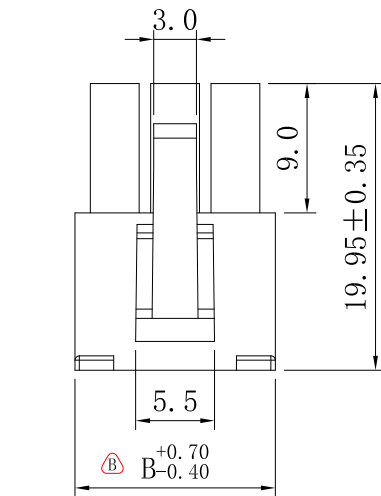

JVT1149HXX-2*XXXX

- Logo
Series NO.
Housing
N2-PA66 V-2(Transparent)
N0-PA66 V-0(Milky)
- NO-natural color
BK-Black
RE-Red
BL-Blue
GR-Green
OR-Orange
YE-Yellow
BR-Purple
Pin NO.



Poles	Dimensions in. (mm)		Poles	Dimensions in. (mm)	
	A	B		A	B
2*01	—	5.70	2*08	29.40	35.10
2*02	4.20	9.90	2*09	33.60	39.30
2*03	8.40	14.10	2*10	37.80	43.50
2*04	12.60	18.30	2*11	42.00	47.70
2*05	16.80	22.50	2*12	46.20	51.90
2*06	21.00	26.70			
2*07	25.20	30.90			

				GENERAL TOLERANCE		JVT 乔业连接器 JVT CONNECTORS		Approved by	Check	Design	Standard	4.2mm DUAL ROW Male HSG		
B	B尺寸变更公差	20230208	CLYDE	0 ±0.35		LI	CLYDE	LU	P/N	JVT1149HXX-2*XXXX				
Version	Content of change	Date	Signature	.0 ±0.30	Unit	mm	Scale	1:1	Date	20230208	Map title	031	Version	B
				.00 ±0.20										
				.000 ±0.10										

A B C D E F G H