
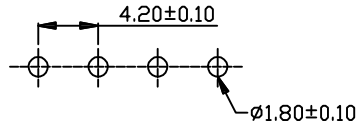

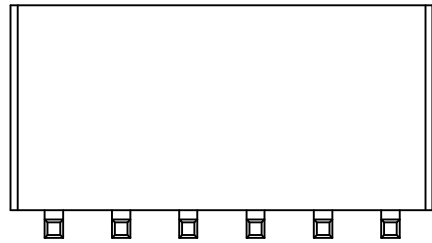
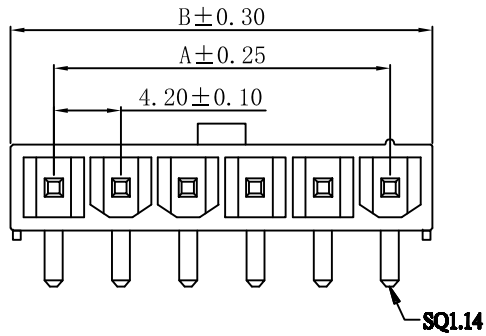
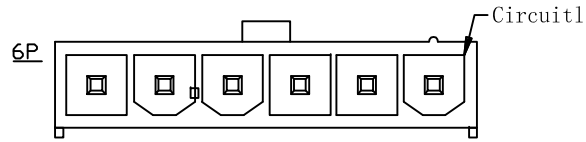
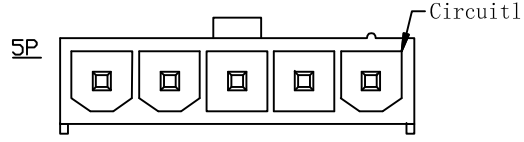
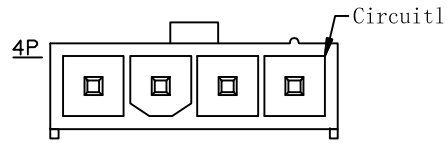
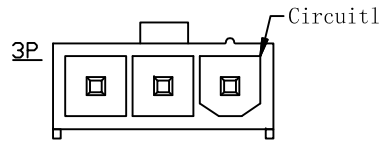



RoHS



SPECIFICATIONS

- Voltage rating: 600V AC/DC
- Current rating: 7A AC/DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min.
- Temperature range: -40°C ~ +105°C
- Contact resistance: 20mΩ Max.

- Material: PA66 UL 94V-2
- pin: Brass Tin-plated

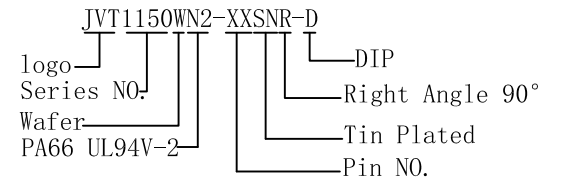

PART NO.	Dimensions (mm)	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

Version	Content of change	Date	Signature	<table border="1"> <tr> <th colspan="2">GENERAL TOLERANCE</th> </tr> <tr> <td>0</td> <td>±0.35</td> </tr> <tr> <td>.0</td> <td>±0.30</td> </tr> <tr> <td>.00</td> <td>±0.20</td> </tr> <tr> <td>.000</td> <td>±0.10</td> </tr> </table>	GENERAL TOLERANCE		0	±0.35	.0	±0.30	.00	±0.20	.000	±0.10	Unit	mm	Scale	1:1	Date	20150922	Approved by	LI	Check	CLYDE	Design	LU	Standard	4.2mm WAFER Solid needle
GENERAL TOLERANCE																												
0	±0.35																											
.0	±0.30																											
.00	±0.20																											
.000	±0.10																											
																P/N	JVT1150WN2-XXSNR-D											
																Map title	010	Version	A0									

A

B

C

D

E

F

G

H