
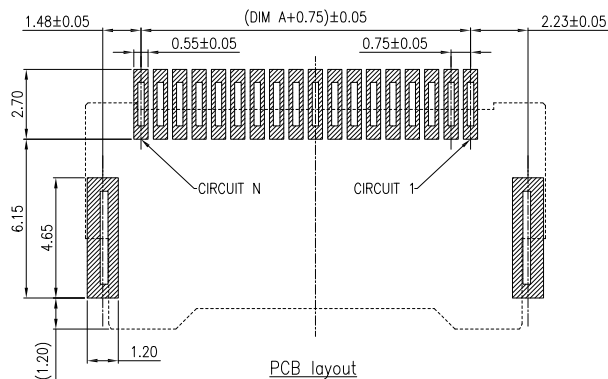


RoHS

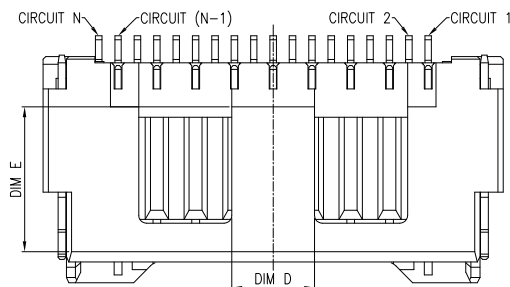

■ SPECIFICATION

- Voltage rating: 100V AC, DC
- Current Rating: 2.0A, AC, DC
- Withstand voltage: 500V AC/minute
- Contact resistance: 20mΩ max
- Temperature range: -40° C ~ +105° C
- Insulation resistance: 500MΩ min






■ HOUSING

- Material: LCP UL 94V-0
- Color: Nature

JVT1503WLP-2*XXSWR-S

Logo
Series NO.
Wafer
LCP UL94V-0

S-SMT
R-90°
SW-Matte Tin plating
Pin NO.

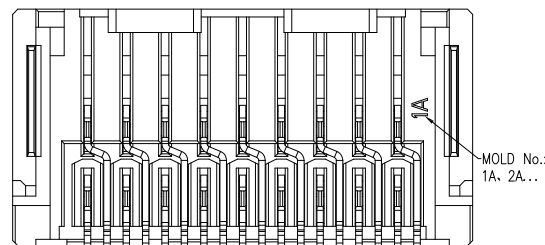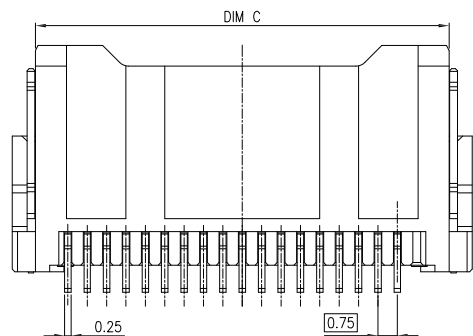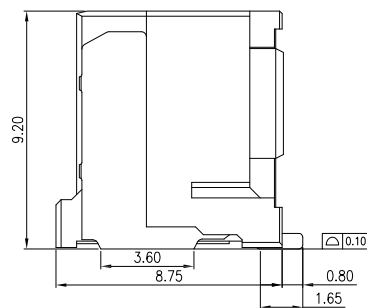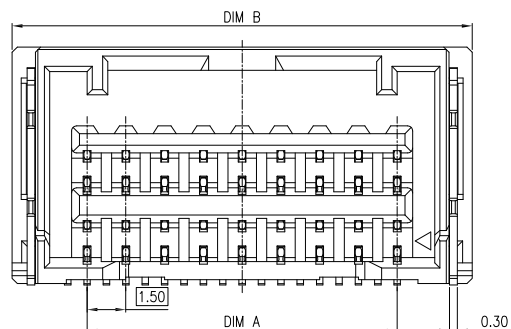

Poles	DIM A	DIM B	DIM C	DIM D	DIM E
2*04	4.50	10.30	8.50	3.60	2.75
2*05	6.00	11.80	10.00		
2*06	7.50	13.30	11.50	2.30	5.60
2*07	9.00	14.80	13.00		
2*08	10.50	16.30	14.50	2.50	
2*09	12.00	17.80	16.00		
2*10	13.50	19.30	17.50	3.20	
2*11	15.00	20.80	19.00		
2*12	16.50	22.30	20.50	4.20	
2*13	18.00	23.80	22.00		
				5.20	

Version	Content of change	Date	Signature	Unit	mm	Scale	1:1	Date	20210922



Approved by	Check	Design	Standard	1.5mm Double row WAFER 90° SMT		
LI	CLYDE	LU	P/N	JVT1503WLP-2*XXSWR-S		
			Map title	141	Version	A0

A

B

C

D

E

F

G

H