
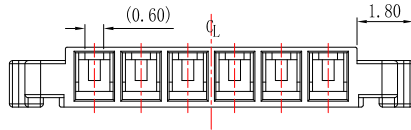
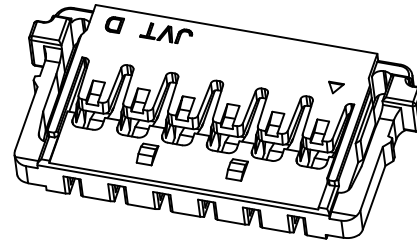


RoHS

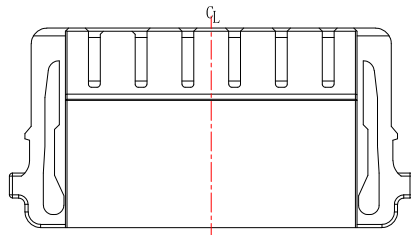






- SPECIFICATIONS :**
- Voltage Rating: 150V AC / DC
 - Current Rating: 3.0A AC / DC (AWG 24#)
 - Withstanding Voltage: 500V AC/minute
 - Temperature Range: -40°C~+105°C
 - Insulation Resistance: 1000M Ω Min.
 - Contact Resistance: 40m Ω Max.
 - Suitable JVT1505T series Terminal
JVT1505W series Wafer

Material:
Material: PA66 UL 94V-0
Color: Black/Natural

Packing specifications:
2~10P 2,000 pcs/bag
11P above 1,000 pcs/bag
*is the key control size

JVT1505HNO-XXXX

Logo
Series NO. | WH-White
Housing | BK-Black
PA66 UL94V-0 | Pin NO.

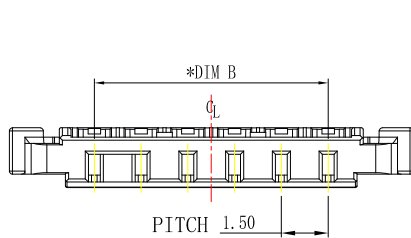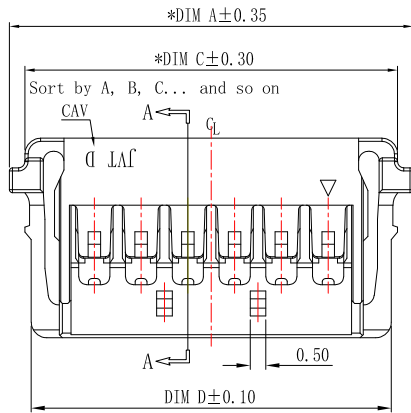

SECTION A-A

| CKL | DimA | DimB | DimC | DimD |
|-----|-------|------|-------|-------|
| 02 | 6.95 | 1.5 | 5.95 | 5.55 |
| 03 | 8.45 | 3.0 | 7.45 | 7.05 |
| 04 | 9.95 | 4.5 | 8.95 | 8.55 |
| 05 | 11.45 | 6.0 | 10.45 | 10.05 |
| 06 | 12.95 | 7.5 | 11.95 | 11.55 |
| 07 | 14.45 | 9.0 | 13.45 | 13.05 |
| 08 | 15.95 | 10.5 | 14.95 | 14.55 |
| 09 | 17.45 | 12.0 | 16.45 | 16.05 |
| 10 | 18.95 | 13.5 | 17.95 | 17.55 |
| 11 | 20.45 | 15.0 | 19.45 | 19.05 |
| 12 | 21.95 | 16.5 | 20.95 | 20.55 |

| | | | | | | | | | | | | | | |
|---------|-------------------|------|-----------|--|---|-----------------------------|-------|-------------|-------|----------|-----------|-----------------|---------|----|
| | | | | GENERAL TOLERANCE | | JVT 乔业连接器 JVT CONNECTORS | | Approved by | Check | Design | Standard | 1.5mm HSG | | |
| | | | | 0 ±0.35 .0 ±0.30 .00 ±0.20 .000 ±0.10 | | CONNECTORS | | LI | CLYDE | LU | P/N | JVT1505HNO-XXXX | | |
| Version | Content of change | Date | Signature | Unit | | mm | Scale | 1:1 | Date | 20211015 | Map title | 031 | Version | A0 |
| A | B | C | D | E | F | G | H | | | | | | | |