


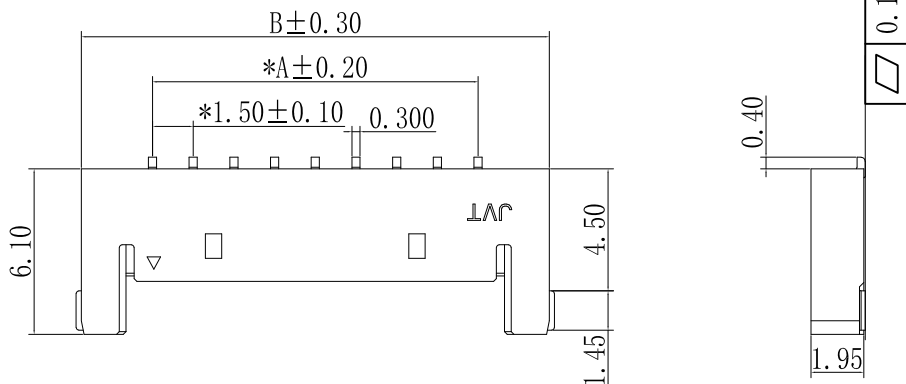
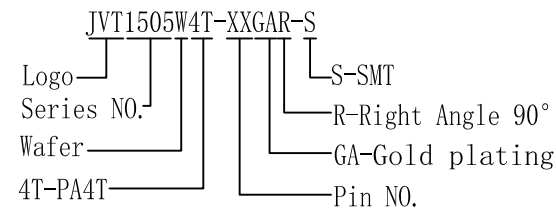



RoHS

SPECIFICATION


- Voltage rating: 150V AC, DC
- Current Rating: 3.0A, AC, DC
- Withstand voltage: 500V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C
- After environmental testing: ≤40mΩ

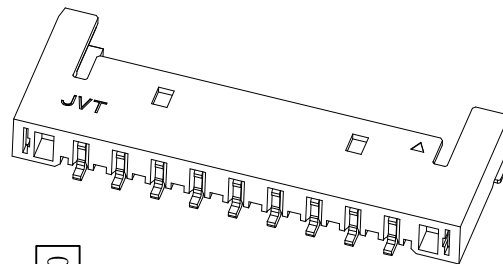

02~04P

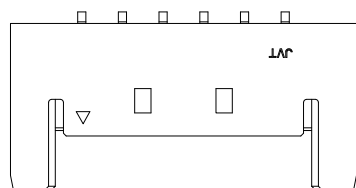

05~12P

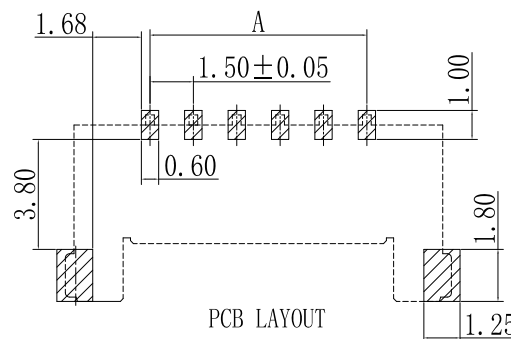

Poles	Dimensions (mm)	
	A	B
02	1.50	6.75
03	3.00	8.25
04	4.50	9.75
05	6.00	11.25
06	7.50	12.75
07	9.00	14.25
08	10.50	15.75
10	13.50	18.75
11	15.00	20.25
12	16.50	21.75

JVT1505W4T-XXGAR-S	PA4T UL94V-0	Phorphos bronzw	Gold-Flash	Brass	Plating Tin	JVT1505
PART NO	Material	Material (Pin)	Finish (Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates with JVT Housing



Approved by	Check	Design	Standard	1.5mm 90° SMT WAFER		
LI	CLYDE	LU	P/N	JVT1505W4T-XXGAR-S		
			Map title	031	Version	A0

Version	Content of change	Date	Signature	Unit	mm	Scale	1:1	Date	20190321

