
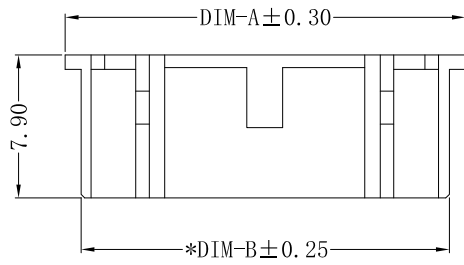
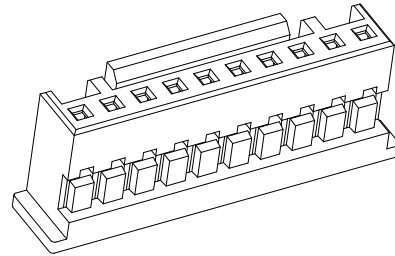




RoHS

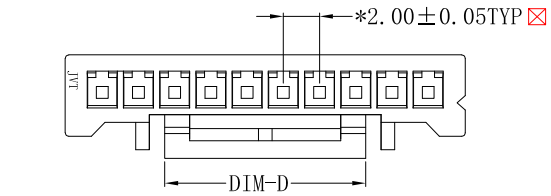

- SPECIFICATIONS**
- Voltage Rating: 250V AC / DC
 - Current Rating: 3A AC / DC
 - Withstanding Voltage: 800V AC/minute
 - Temperature Range: -40°C~+105°C
 - Insulation Resistance: 1000MΩ Min.
 - Contact Resistance: 20mΩ Max.
 - Suitable JVT2032T series Terminal
JVT2032W series Wafer

■ Material
Material: PA66 UL 94V-0
Color: White/Black



■ Packing specifications:
2~10P 2,000 pcs/bag
11P Above 1,000 pcs/bag
*is the key control size

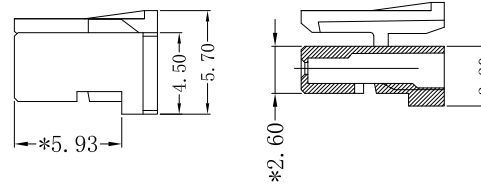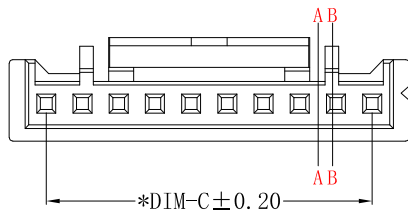

JVT2032HNO-XXXXL

Logo —
Series NO. —
Housing —
PA66 UL94V-0 —

Lock —
BK-Black —
Blank-natural color —
Pin NO. —

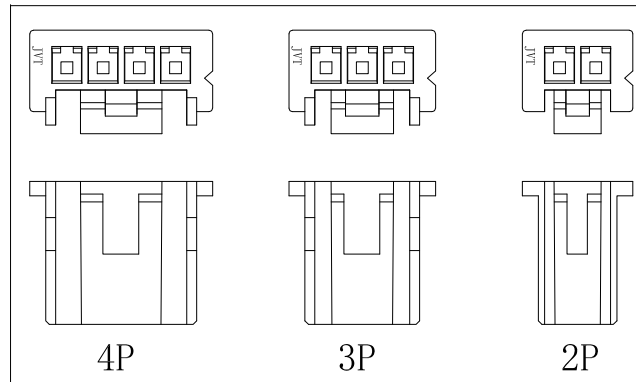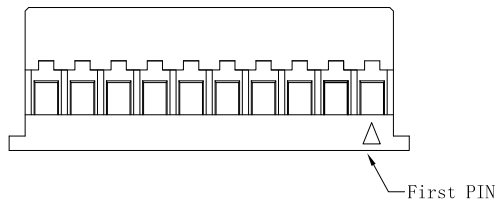

CIRCUITS	DIM. A	DIM. B	DIM. C	DIM. D
02	6.10	4.34	2.00	2.6
03	8.10	6.34	4.00	3.45
04	10.10	8.34	6.00	4.5
05	12.10	10.34	8.00	4.5
06	14.10	12.34	10.00	
07	16.10	14.34	12.00	
08	18.10	16.34	14.00	
09	20.10	18.34	16.00	11.1
10	22.10	20.34	18.00	
11	24.10	22.34	20.00	
12	26.10	24.34	22.00	
13	28.10	26.34	24.00	4
14	30.10	28.34	26.00	
15	32.10	30.34	28.00	
16	34.10	32.34	30.00	

Version	Content of change	Date	Signature	GENERAL TOLERANCE	Unit	mm	Scale	1:1	Date	20181219	Approved by	Check	Design	Standard	2.0mm HSG Lock		
				0 ±0.35 .0 ±0.30 .00 ±0.20 .000 ±0.10							LI	CLYDE	LU	P/N	JVT2032HNO-XXXXL		
														Map title	031	Version	A0

