

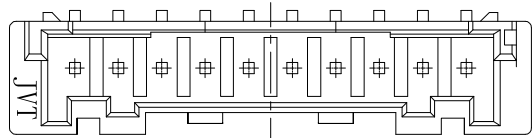



RoHS




10P~16P

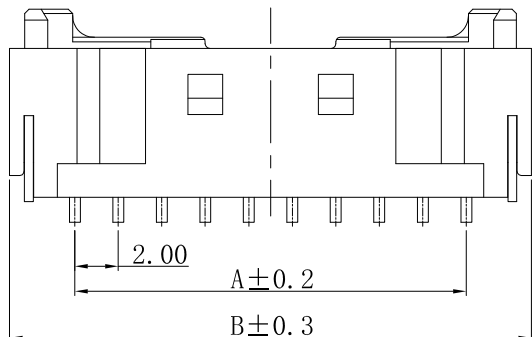


Assembly Layout




2P






3P



4P



5P~9P

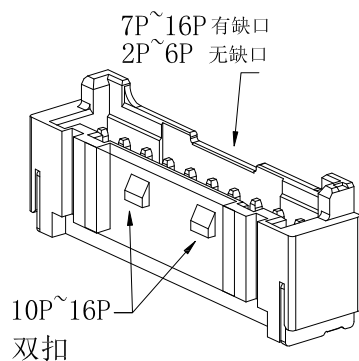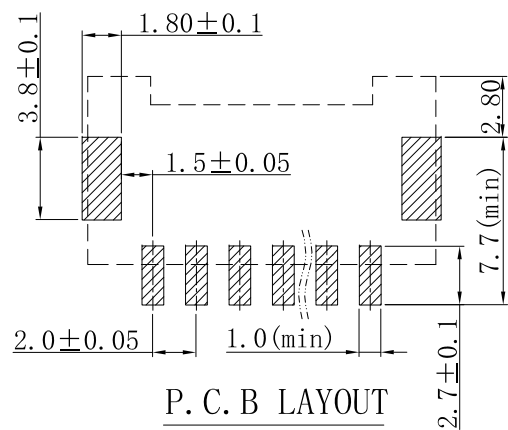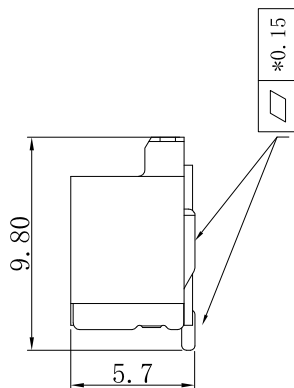


■ SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 800V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C

■ WAFER

- Material: PA4T UL94V-0/LCP UL94V-0
- Contact Pin: Brass
- Solder tab: Brass
- Mates With Part(s): JVT2032 HSG and TER

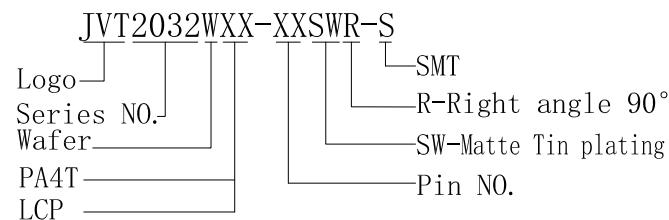

Poles	Dimension (mm)		Poles	Dimension (mm)	
	A	B		A	B
02	2.0	8.0	10	18.0	24.0
03	4.0	10.0	11	20.0	26.0
04	6.0	12.0	12	22.0	28.0
05	8.0	14.0	13	24.0	30.0
06	10.0	16.0	14	26.0	32.0
07	12.0	18.0	15	28.0	34.0
08	14.0	20.0	16	30.0	36.0
09	16.0	22.0			



Version	Content of change	Date	Signature	Unit	mm	Scale	1:1	Date	20140412
GENERAL TOLERANCE									
0 ±0.35									
.0 ±0.30									
.00 ±0.20									
.000 ±0.10									



Approved by	Check	Design	Standard	2.0mm WAFER 90°		
LI	CLYDE	LU	P/N	JVT2032WXX-XXSWR-S		
			Map title	031	Version	A0