



RoHS

Specifications






- Voltage rating: 250V AC/ DC
- Current rating: 3A AC/ DC
- Withstanding Voltage: 1000V AC/minute.
- Insulation resistance: 1000MΩ Min.
- Temperature range: -40° C~+105° C
- Contact resistance: Initial Value/30mΩ Max.

Wafer

- Part No. : JVT2041W46-2*XXSNC-S
- Poles : 2*02-2*25P
- Material: Nylon 46 UL 94V-0
- Pin: Brass/Tin-Plated
- Q' ty: 500 Pcs/Reel
- Mates With Part(s): JVT2041 Crimp Housing and Terminal

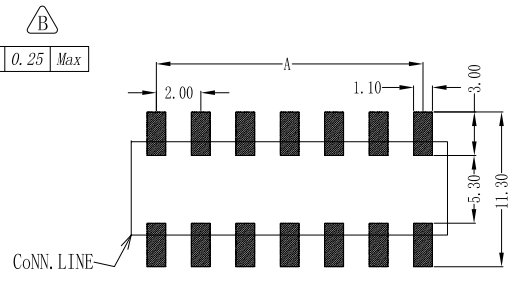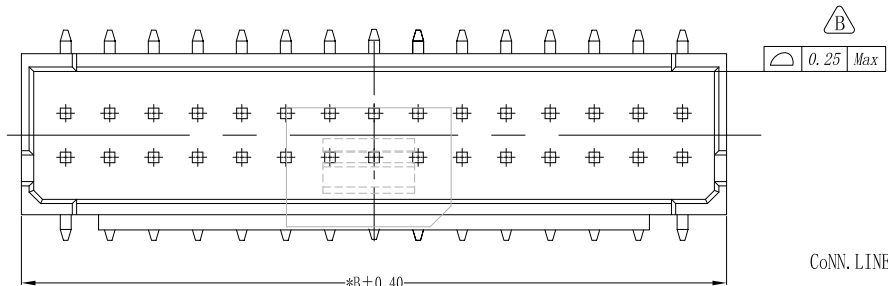

PCB LAYOUT

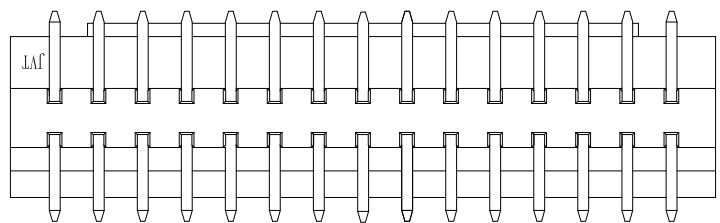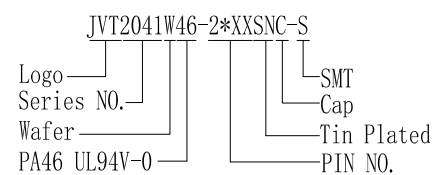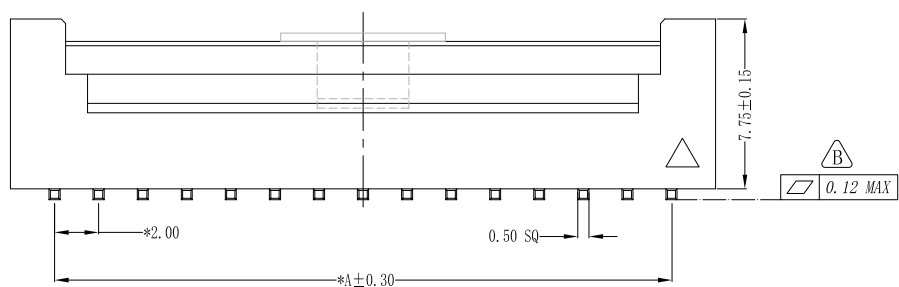

PIN	"A"	"B"	PIN	"A"	"B"
2*02	2.00	6.00	2*14	26.00	30.00
2*03	4.00	8.00	2*15	28.00	32.00
2*04	6.00	10.00	2*16	30.00	34.00
2*05	8.00	12.00	2*17	32.00	36.00
2*06	10.00	14.00	2*18	34.00	38.00
2*07	12.00	16.00	2*19	36.00	40.00
2*08	14.00	18.00	2*20	38.00	42.00
2*09	16.00	20.00	2*21	40.00	44.00
2*10	18.00	22.00	2*22	42.00	46.00
2*11	20.00	24.00	2*23	44.00	48.00
2*12	22.00	26.00	2*24	46.00	50.00
2*13	24.00	28.00	2*25	48.00	52.00

Version		Content of change		Date	Signature	<p>GENERAL TOLERANCE</p> <p>0 ±0.35</p> <p>.0 ±0.30</p> <p>.00 ±0.20</p> <p>.000 ±0.10</p>		<p>JVT 杰业连接器</p> <p>JVT CONNECTORS</p>			Approved by	Check	Design	Standard	2.0mm 180° WAFER SMT		
B		增加平整度管控		20230624	CLYDE	<p>Unit</p> <p>mm</p> <p>Scale</p> <p>1:1</p> <p>Date</p> <p>20230624</p>		<p>LI</p> <p>CLYDE</p>		<p>LU</p>		<p>P/N</p> <p>JVT2041W46-2*XXSNC-S</p>		<p>Map title</p> <p>031</p> <p>Version</p> <p>B</p>			