



RoHS

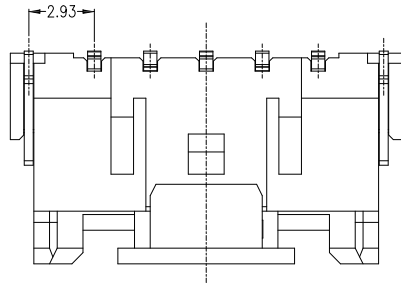

■ SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: 20mΩ Max
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C





■ Material

- Base: PA9T UL94V-0, Natural (Beige)
- pin: Brass Sn-plated
- Solder Tabs: Brass Sn-plated
- Cap: PA9T UL94V-0, Natural (Beige)

JVT2508W9T-XXSNC-S

Logo
Series NO.
Wafer
PA9T UL94V-0

S-SMT
C-CAP
Tin Plated
Pin NO.

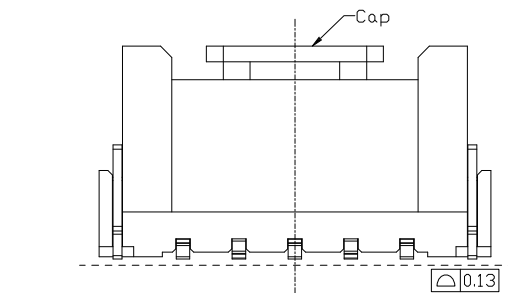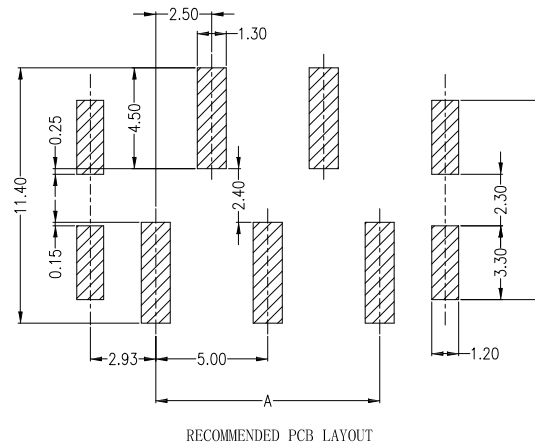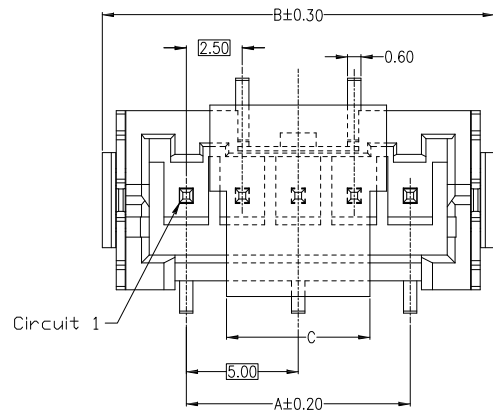

Circuit 1	Dimensions (mm)		
	A	B	C
02	2.50	10.00	5.30
03	5.00	12.50	
04	7.50	15.00	6.40
05	10.00	17.50	
06	12.50	20.00	
07	15.00	22.50	
08	17.50	25.00	
09	20.00	27.50	
10	22.50	30.00	
11	25.00	32.50	
12	27.50	35.00	
13	30.00	37.50	
14	32.50	40.00	
15	35.00	42.50	



Version		Content of change		Date	Signature	<p>GENERAL TOLERANCE</p> <p>0 ±0.35</p> <p>.0 ±0.30</p> <p>.00 ±0.20</p> <p>.000 ±0.10</p>			<p>JVT 乔业连接器</p> <p>JVT CONNECTORS</p> <p>CONNECTORS</p>			Approved by	Check	Design	Standard	2.5mm 180° SMT WAFER		
						Unit	mm	Scale	1:1	Date	20210922	LI	CLYDE	LIU	P/N	JVT2508W9T-XXSNC-S		
															Map title	141	Version	A0