



RoHS

■ SPECIFICATIONS :

- Voltage Rating: 600V AC / DC
- Current Rating: 7A AC / DC
- Withstanding Voltage: 1500V AC/minute
- Temperature Range: -40°C~+105°C
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 20mΩ Max.

■ \*Material:

Material: PA66 UL 94V-0  
PA66 UL 94V-2

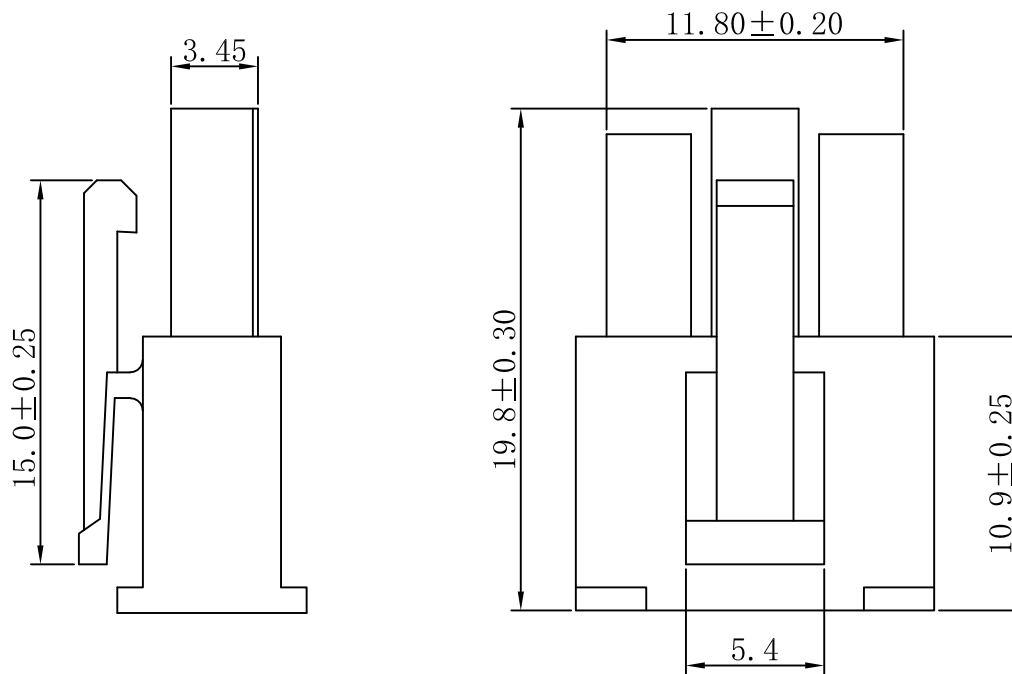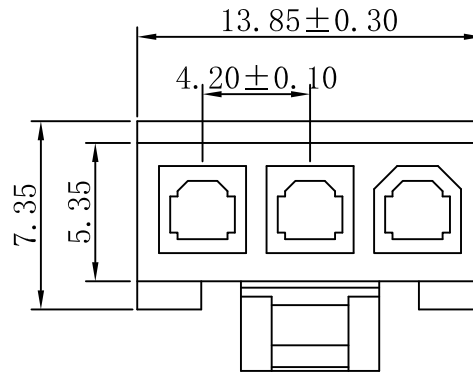

JVT1149HXX-03A  
 logo | Series NO. | Housing | Pin NO.  
 N0-PA66 UL94V-0  
 N2-PA66 UL94V-2



			GENERAL TOLERANCE			Approved by			Check		Design		Standard		4.2mm Male HSG Mid Hight		
			0 ±0.35			LI			CLYDE		LU		P/N		JVT1149HXX-03A		
			.0 ±0.30			Unit			mm		Scale		1:1		Date		
Version			Content of change			Date			Signature			Date		20210922		Map title	
			.00 ±0.20			Date			Date		20210922		044		Version		
			.000 ±0.10			Date			Date		20210922		A0		A0		

**JVT** 乔业连接器  
**JVT CONNECTORS**  
 CONNECTORS