





RoHS

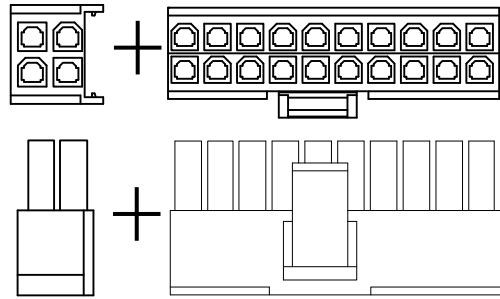


JVT1149HXX-04P+20B-A

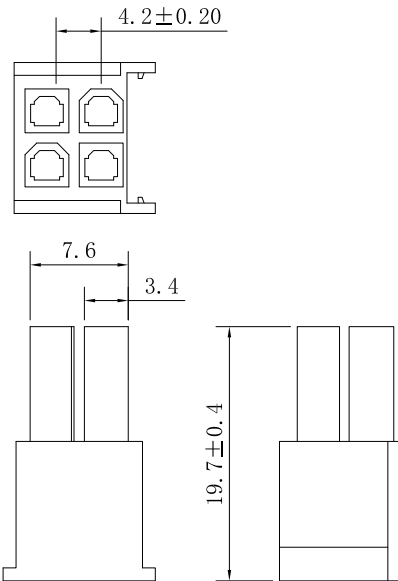

JVT1149HN2-04P-A

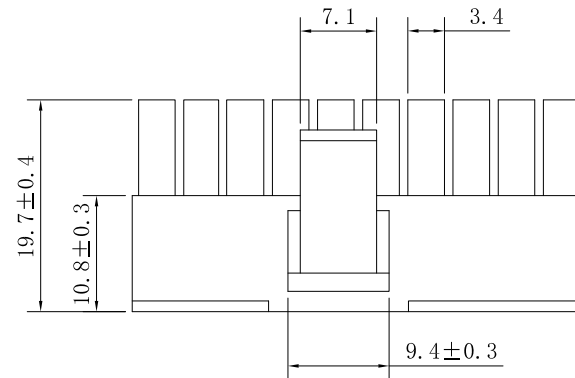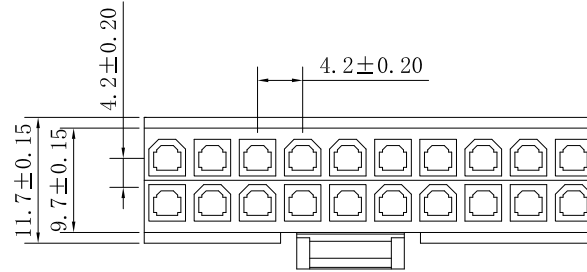

JVT1149HN2-20B-A



- SPECIFICATIONS :
- Voltage Rating: 600V AC / DC
 - Current Rating: 7A AC / DC
 - Withstanding Voltage: 1500V AC/minute
 - Temperature Range: -40℃~+105℃
 - Insulation Resistance: 1000MΩ Min.
 - Contact Resistance: 20mΩ Max.

■ *Material:
Material: PA66 UL 94V-2

JVT1149HN2-04P+20BXX-A

Logo Series N0using N2-PA66 UL94V-2

Code Blank-Natural BK-Black Assembly PIN NO.

滑轨式



			GENERAL TOLERANCE			JVT 乔业连接器 JVT CONNECTORS			Approved by	Check	Design	Standard	MLX 4.2mm HSG 04P+20B 滑轨式		
			0 ±0.35 .0 ±0.30 .00 ±0.20 .000 ±0.10			CONNECTORS			LI	CAO	LIU	P/N	JVT1149HN2-04P+20BXX-A		
Version	Content of change	Date	Signature	Unit	mm	Scale	1:1	Date	20150922		Map title	044	Version	A	