


RoHS


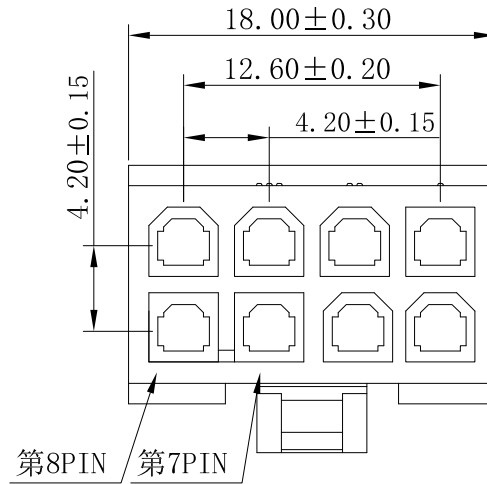


■ SPECIFICATIONS :

- Voltage Rating: 600V AC / DC
- Current Rating: 7A AC / DC
- Withstanding Voltage: 1500V AC/minute
- Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Insulation Resistance: $1000\text{M}\Omega$ Min.
- Contact Resistance: $20\text{m}\Omega$ Max.

■ *Material:

Material: PA66 UL 94V-0
 PA66 UL 94V-2

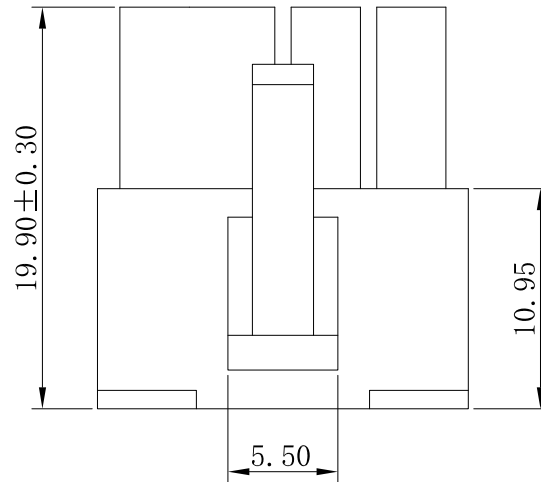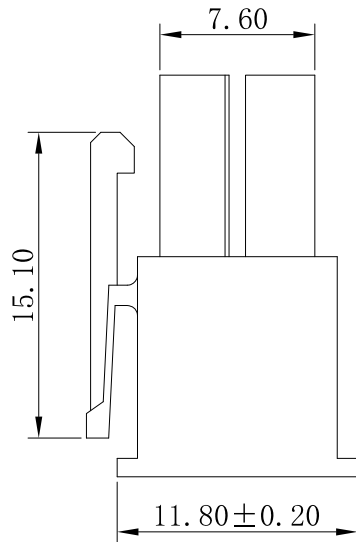

JVT1149HXX-2*04XX-T78

logo
 Series NO.
 Housing
 N0-PA66 UL 94V-0
 N2-PA66 UL 94V-2
 Twins7/8
 BK-Black
 Blank-Natural color
 Pin NO.



				GENERAL TOLERANCE		JVT 乔业连接器		Approved by		Check		Design		Standard		4.2mm Male HSG 第7、8Pin连体 小孔	
				0 ±0.40		JVT CONNECTORS		LI		CLYDE		LU		P/N		JVT1149HXX-2*04XX-T78	
				.0 ±0.35		CONNECTORS								Map title		044 Version A	
Version		Content of change		Date		Unit		mm		Scale		1:1		Date		20211122	
A		B		C		D		E		F		G		H			