



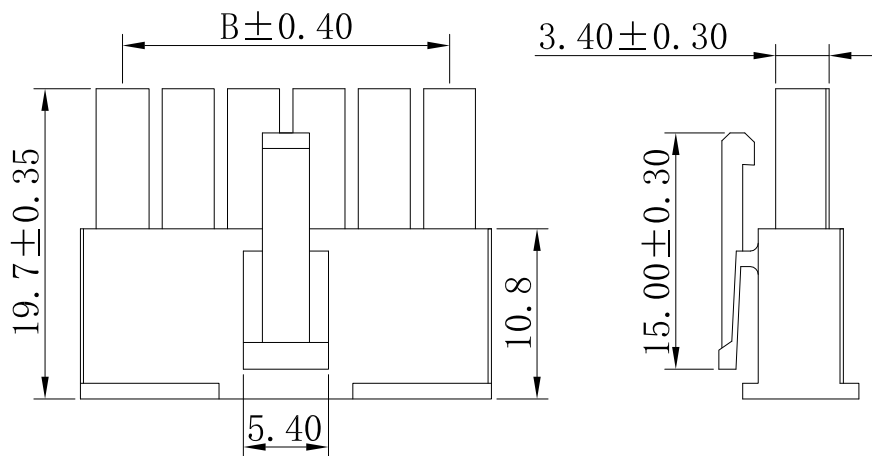


RoHS

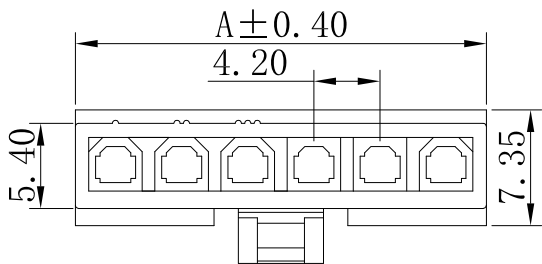


SPECIFICATION

- Voltage rating: 600V AC/DC
- Current Rating: 7A AC/DC
- Withstand voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ/min
- Contact resistance: 20mΩ max
- Temperature range: -40° C ~ +105° C

HOUSING

- Part No: JVT1149HXX-XXXX
- Poles: 02~06
- Material: PA66 UL94V-2/V-0
- Q' ty: 1000PCS/Bag
- Mates With Part(s): JVT1149 Terminal

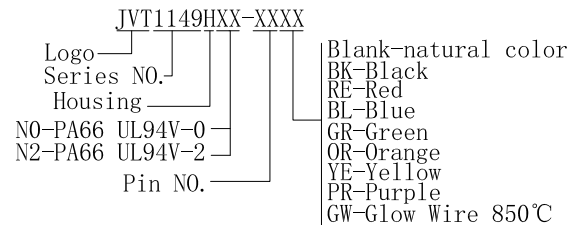

Poles	Dimensions (mm)	
	A	B
02	9.50	4.20
03	13.70	8.40
04	17.90	12.60
05	22.10	16.80
06	26.30	21.00

				GENERAL TOLERANCE		JVT 乔业连接器 JVT CONNECTORS		Approved by	Check	Design	Standard	4.2mm HSG			
A1		Add chamfer		20211210	CLYDE	CONNECTORS		LI	CLYDE	LU	P/N	JVT1149HXX-XXXX			
Version	Content of change		Date	Signature	Unit		mm	Scale	1:1	Date	20211210	Map title	044	Version	A1