

RoHS

■ SPECIFICATION

- Voltage rating: 600V AC, DC
- Current Rating: 7A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C






■ WAFER

- Material: Base: Nylon 66 UL94V-2  
pin: Brass Tin-plated

JVT1150WN2-2\*XXSNXX-D

Logo  
Series NO.  
WAFER  
PA66 UL94V-2

DIP  
Blank-Natural color  
BL-Blue  
BK-Black  
Tin Plated  
Pin NO.

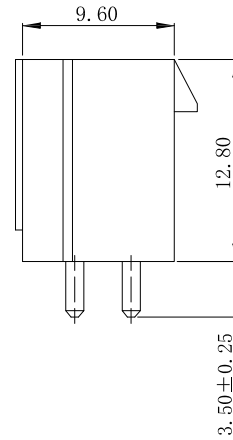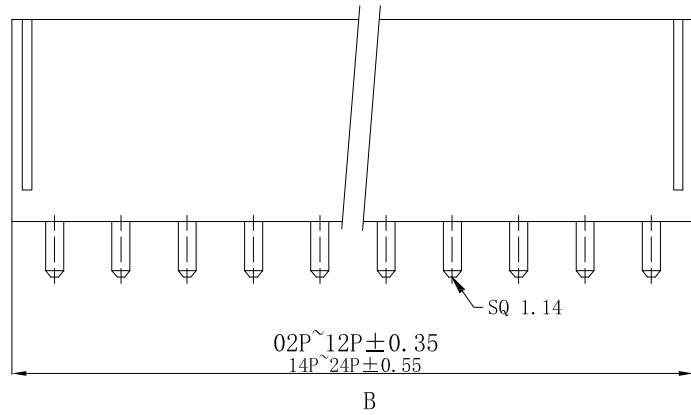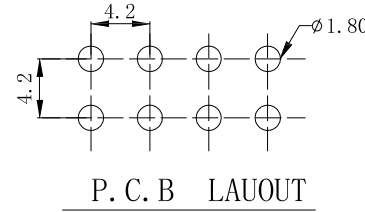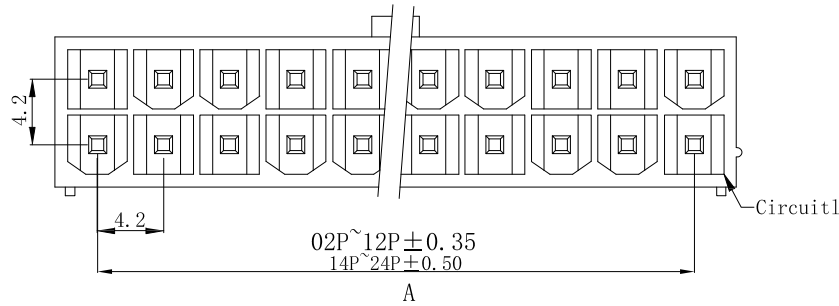

PIN	DIM. (mm)	
	A	B
2*1	--	5.40
2*2	4.20	9.60
2*3	8.40	13.80
2*4	12.60	18.00
2*5	16.80	22.20
2*6	21.00	26.40
2*7	25.20	30.60
2*8	29.40	34.80
2*9	33.60	39.00
2*10	37.80	43.20
2*11	42.00	47.40
2*12	46.20	51.60



Version		Content of change		Date	Signature	Unit	mm	Scale	1:1	Date	20230324	Approved by	Check	Design	Standard	4.2mm WAFER Solid needle		
												LI	CLYDE	LU	P/N	JVT1150WN2-2*XXSNXX-D		
															Map title	010	Version	A0

