
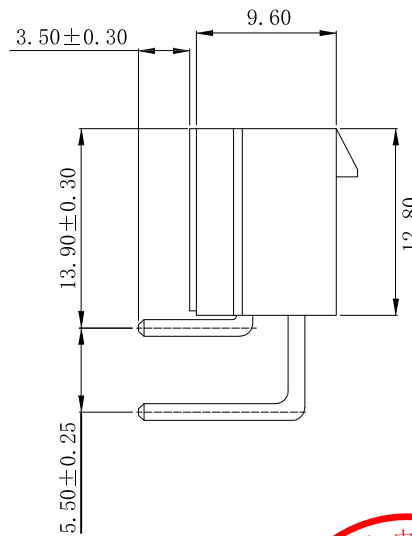
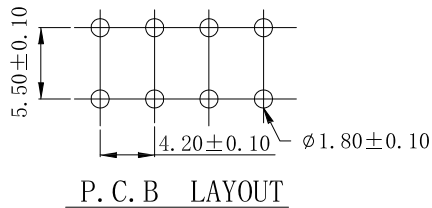
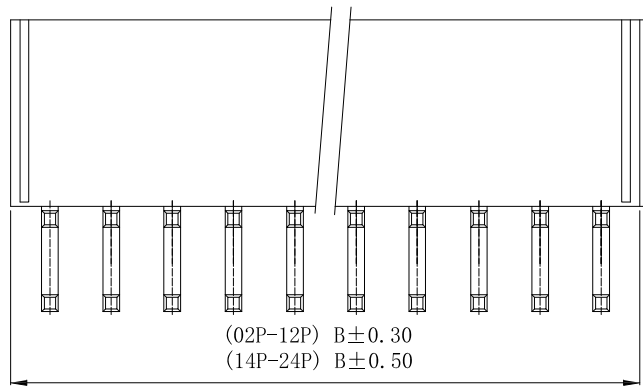


RoHS

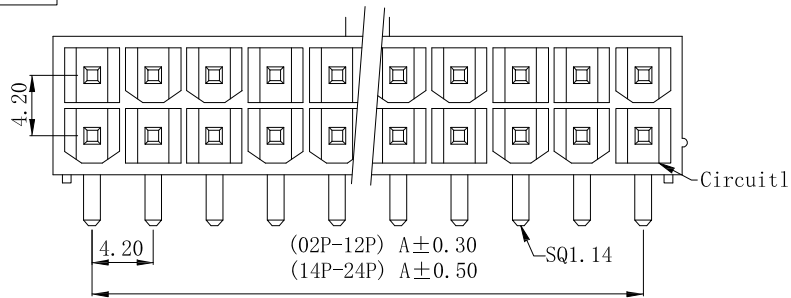

■ SPECIFICATIONS

- Voltage rating: 600V AC/DC
- Current rating: 7A AC/DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min.
- Temperature range: -40°C - +105°C
- Contact resistance: 20mΩ Max.

■ HOUSING

- Material: PA66 UL94V-2
- pin: Brass Tin-plated

JVT1150WN2-2*XXSNR-D
 Logo — Series NO. — Wafer — PA66 UL94V-2 —
 DIP — Right Angle 90° — Tin Plated — Pin NO. —

Contact	Dimensions	
	A	B
2*01	---	5.40
2*02	4.20	9.60
2*03	8.40	13.80
2*04	12.60	18.00
2*05	16.80	22.20
2*06	21.00	26.40
2*07	25.20	30.60
2*08	29.40	34.80
2*09	33.60	39.00
2*10	37.80	43.20
2*11	42.00	47.40
2*12	46.20	51.60



			GENERAL TOLERANCE			Approved by		Check	Design	Standard	4.2mm DUAL ROW 90° WAFER												
			0 ±0.35			LI		CLYDE	LU	P/N	JVT1150WN2-2*XXSNR-D												
			.0 ±0.30			Unit		mm	Scale	1:1	Date	20180426	Map title	010	Version	A0							
Version			Content of change			Date			Signature														
A			B			C			D			E			F			G			H		

