

RoHS

SPECIFICATION

- Voltage rating: 600V AC, DC
- Current Rating: 7-10A, AC, DC
- Withstand voltage: 1500V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C
- Suitable With: JVT1149 Crimp HSG and TER

WAFER





- Material: Base: Nylon 66 UL94V-0/2
pin: Brass Tin-plated
Color: natural color
- *is the key control size
Compliant with RoHS and REACH

JVT1151WXX-2*XXSNP-D

logo ————
Series NO: ————
Wafer ————
PA66 UL94V-0 ————
PA66 UL94V-2 ————
DIP
With boss
Tin Plated
Pin NO.



PIN	DIM. (mm)	
	A	B
2*01	--	5.40
2*02	4.20	9.60
2*03	8.40	13.80
2*04	12.60	18.00
2*05	16.80	22.20
2*06	21.00	26.40
2*07	25.20	30.60
2*08	29.40	34.80
2*09	33.60	39.00
2*10	37.80	43.20
2*11	42.00	47.40
2*12	46.20	51.60

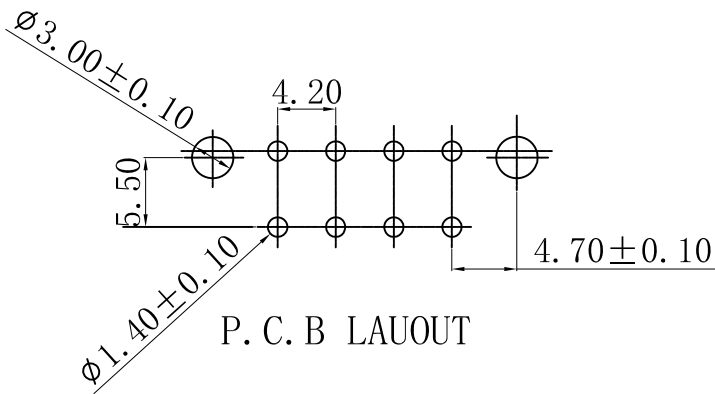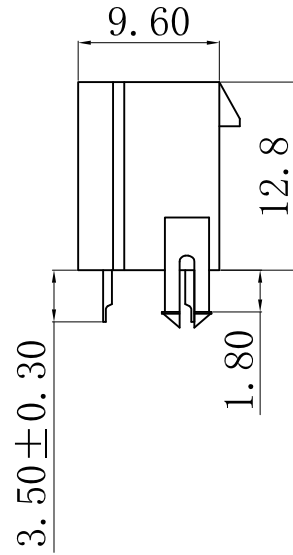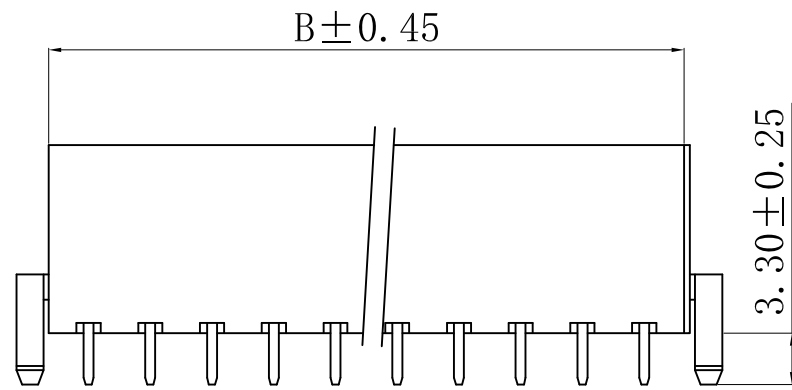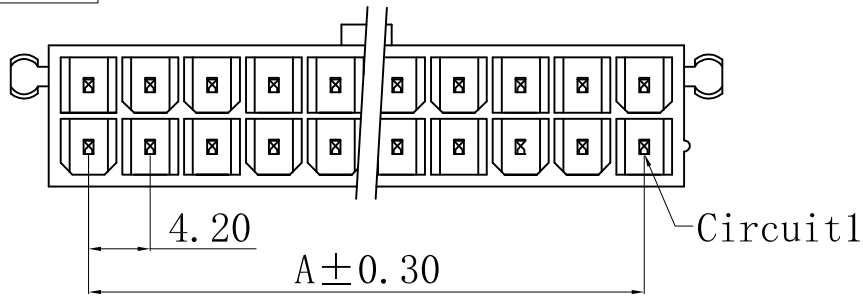

P. C. B LAUOUT

			<p>GENERAL TOLERANCE</p> <p>0 ±0.40</p> <p>.0 ±0.35</p> <p>.00 ±0.25</p> <p>.000 ±0.15</p>				<p>JVT 乔业连接器</p> <p>JVT CONNECTORS</p> <p>CONNECTORS</p>			Approved by	Check	Design	Standard	4.2mm DUAL ROW Boss 180° DIP WAFER 空心针		
Version	Content of change	Date	Signature	Unit	mm	Scale				1:1	Date	20210725	LI	CLYDE	LU	P/N
													Map title	272	Version	A0