




RoHS

- SPECIFICATIONS :
- Voltage Rating: 250V AC / DC
 - Current Rating: 5A AC / DC
 - Withstanding Voltage: 1000V AC/minute
 - Temperature Range: -40°C~+105°C
 - Insulation Resistance: 1000MΩ Min.
 - Contact Resistance: 10mΩ Max.
 - *Suitable JVT3024T series Terminal
JVT3025H series Housing
- *Material:
Material: PA66 UL 94V-0
Color:natural color/Black
- Packing specifications:
2~10P 2,000 pcs/bag
11P above 1,000 pcs/bag
*is the key control size

JVT3024HN0-XXXX

logo ———
Series NO. ———
Housing ———
PA66 UL94V-0 ———

No-natural color
BK-Black
Pin NO.

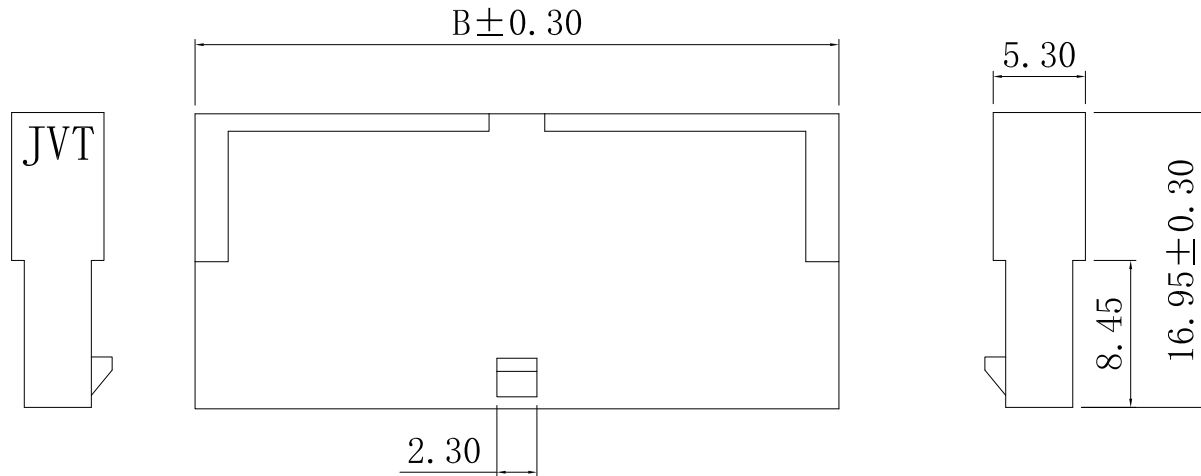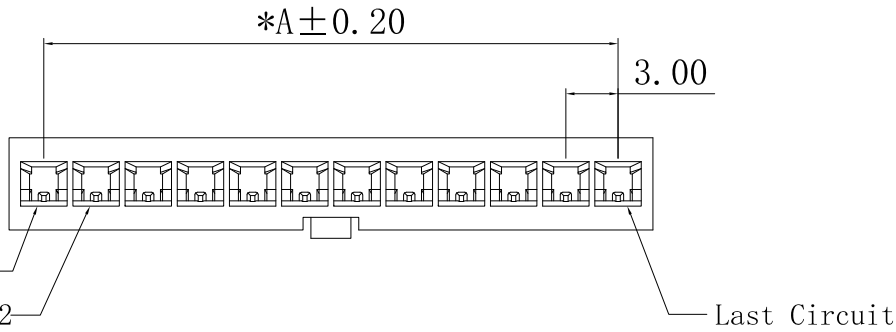

Poles	Dimensions (mm)	
	A	B
02	3.00	7.00
03	6.00	10.00
04	9.00	13.00
05	12.00	16.00
06	15.00	19.00
07	18.00	22.00
08	21.00	25.00
09	24.00	28.00
10	27.00	31.00
11	30.00	34.00
12	33.00	37.00

				GENERAL TOLERANCE		JVT 乔业连接器 JVT CONNECTORS		Approved by	Check	Design	Standard	3.0mm HSG Female Single row			
				0 ±0.35		LI		LI	CLYDE	LU	P/N	JVT3024HN0-XXXX			
				.0 ±0.30		Unit		mm	Scale	1:1	Date	031	Version	A0	
Version		Content of change		Date	Signature	Unit		mm	Scale	1:1	Date	031	Version	A0	
A		B		C		D		E		F		G		H	