RoHS

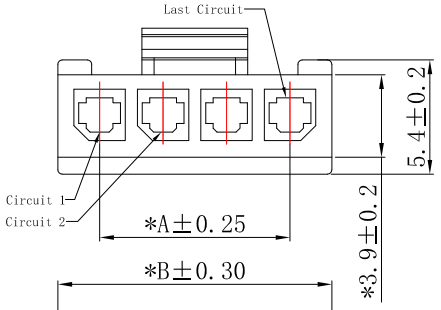

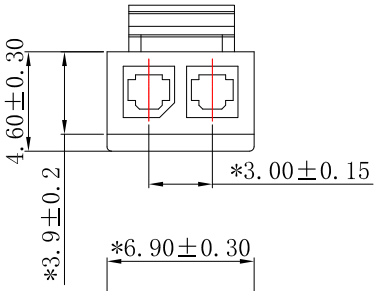



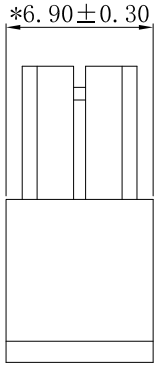



■ SPECIFICATIONS :
- Voltage Rating: 250V AC / DC
- Current Rating: 5A AC / DC
- Withstanding Voltage: 1000V AC/minute
- Temperature Range: -40℃~+105℃
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 10mΩ Max.
- *Suitable JVT3025T series Terminal
  JVT3026W series Wafer

■ *Material:
Material: PA66 UL 94V-0
Color:natural color/Black

■ Packing specifications:
02~05P 2,000 pcs/bag
06P以上 1,000 pcs/bag
*is the key control size

JVT3025HN0-XXXX
- Logo
- Series NO.
- Housing
- N0-PA66 UL94V-0
- No-Natural color
- BK-Black
- Pin NO.



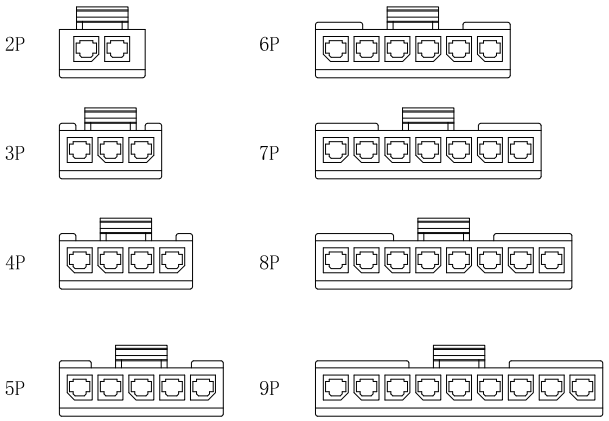

POLES	A	B
02	3.00	6.90
03	6.00	9.90
04	9.00	12.90
05	12.00	15.90
06	15.00	18.90
07	18.00	21.90
08	21.00	24.90
09	24.00	27.90
10	27.00	30.90
11	30.00	33.90
12	33.00	36.90

东莞市乔业电子有限公司 WWW.JVT.LTD
2013.06.04
工程发行章

Version	Content of change	Date	Signature

GENERAL TOLERANCE
0 ±0.35
.0 ±0.30
.00 ±0.20
.000 ±0.10

JVT 乔业连接器 JVT CONNECTORS

Unit	mm	Scale	1:1	Date	20130604

Approved by	Check	Design	Standard	3.0mm HSG	
LI	CLYDE	LU	P/N	JVT3025HN0-XXXX	
			Map title	031	Version A0