


PIN ASSIGNMENT:

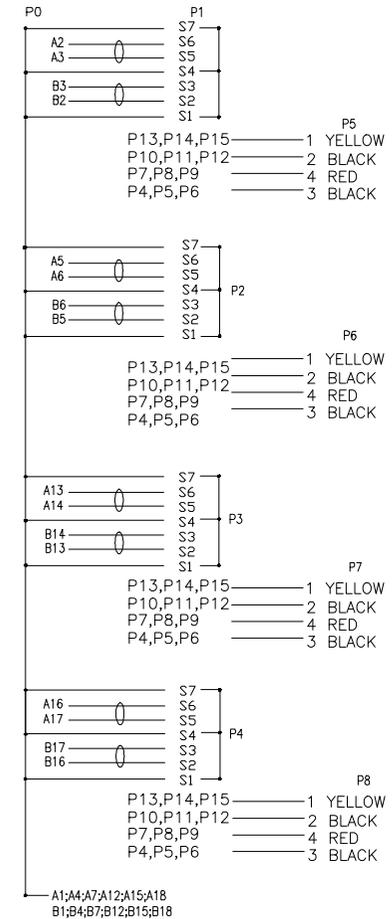

NOTE:
 1.100% OPEN&SHORT TESTIGN,
 2.INSULATION RESISTANCE 10M Ohm MIN DC300V
 3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

NO.	PART NAME	PART NO.	SPEC DESCRIPTION	QTY	UNIT
12	CABLE	AQ-3-MS40108	20AWG (RED/BLACK/YELLOW)	A/R	mm
11	LABLE	AQ-5-MS5039	W6*L24. PRINT *P1&P2&P3&P4*	4	pcs
10	CONN.	AQ-3-GL51S03	4P,NATURAL,PH5.08,PIN:G/F	4	pcs
9	CONN.	AQ-3-GL51S01	SAS 29P/F,PIN:G/F	4	pcs
8	EXPANDD	AQ-3-MS76001	PET BALCK DD: 10mm	A/R	mm
7	ACETATE TAPE	AQ-3-MS77001	W=25±5mm, BLACK	2	pcs
6	MOLDING	AQ-3-GL145201	45P PVC BLACK	A/R	9
5	MOLDING	AQ-3-GL100101	LDPE,NATURAL	A/R	9
4	MOLDING	AQ-3-GL100401	PBT+30%GF BLACK	A/R	9
3	LATCH	AQ-3-MS21008	STAINLESS STEEL	5	pcs
2	PCB	AQ-3-MS31019	MINI SAS 36PIN PCB, PIN:Au 15u", 100±10 ohm	1	PCS
1	CABLE	AQ-3-MS40208	<30AWG*2C+2d>*AL+MYLAR,DD:0.97*2.17MM,100±5 ohm.	A/R	mm

A		INITIAL RELEASE		12/10/12	
REV	DESCRIPTION OF CHANGE			DATE	
TOLERANCE					
INCHES			MM		
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05			
DRAWN BY	TONY CHAN	SCALE	NONE	REV	A
		UNIT	MM		
CHECK BY		SHEET	1/1	CUSTOMER:	
		DATE	16/04/10	DWG NO:	
CUSTOMER P/N:		P/N: AQ-1-MS154P10500			

DIKWAN® DONGGGUAN AIQUN INDUSTRIAL CO., LTD.