


PIN ASSIGNMENT

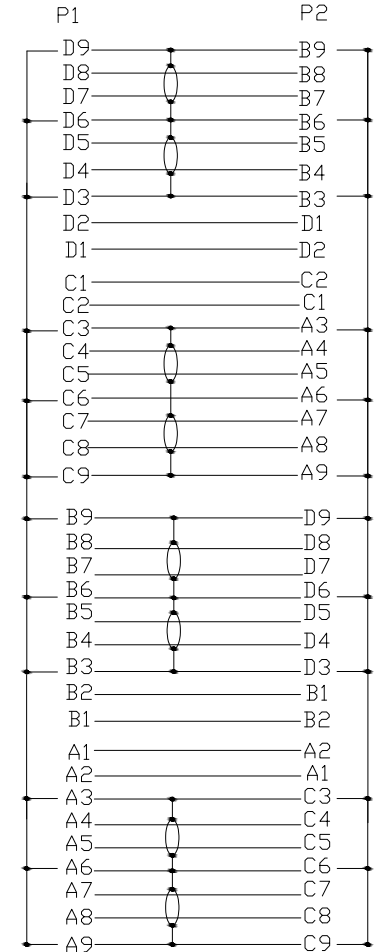

NOTE:
 1.100%OPEN&SHORT TESTIGN,
 2.INSULATION RESISTANCE 10M Ωhm MIN DC300V
 3.CONDUCTIVE RESISTANCE: 2 Ωhm MAX

9	EXPANDD	AQ-3-MS76001	PET BALCK OD: 10mm	A/R	mm						
8	MOLDING	AQ-3-GL10501	PA BLACK	A/R	g						
7	ACETATE TAPE	AQ-3-MS77001	W=25±5mm	A/R	mm						
6	PCB	AQ-3-MS31023	MINI SAS HD 4I PCB(A/B),PIN: AU 15u&30u,100±10 ohm	1	PCS						
5	PCB	AQ-3-MS31022	MINI SAS HD 4I PCB(C/D),PIN: AU 15u&30u,100±10 ohm	1	PCS						
4	COVER	AQ-3-MS64002	MINI SAS HD 4I PC BLACK	1	PCS						
3	HOUSING	AQ-3-MS64001	MINI SAS HD 4I PC BLACK	1	PCS						
2	CABLE	AQ-3-MS20101	30AWG CABLE	A/R	mm						
1	CABLE	AQ-3-MS40206	(30AWG*2C+2d)*AI+MYLAR,OD:0.97*2.17MM,100±10 ohm	A/R	mm						
ND.	PART NAME	PART NO.	SPEC DESCRIPTION	QT'Y	UNIT						
						TOLERANCE INCHES		M/M		DIKWAN® DONGGGUAN AIQUN INDUSTRIAL CO., LTD.	
						.X		.015		.30	
						.XX		.010		.10	
						.XXX		.005		.05	
						DRAWN BY		TONY CHAN		SCALE NONE	
						CHECK BY				UNIT MM	
						CUSTOMER. P/N:		P/N: AQ-1-MS331010500		SHEET 1/1	
						REV		A		DATE 22/06/27	
						TITLE: MINI SAS HD 4i TO 4i		COSTOMER:		DWG NO.:AQ13-021	