


PIN ASSIGNMENT

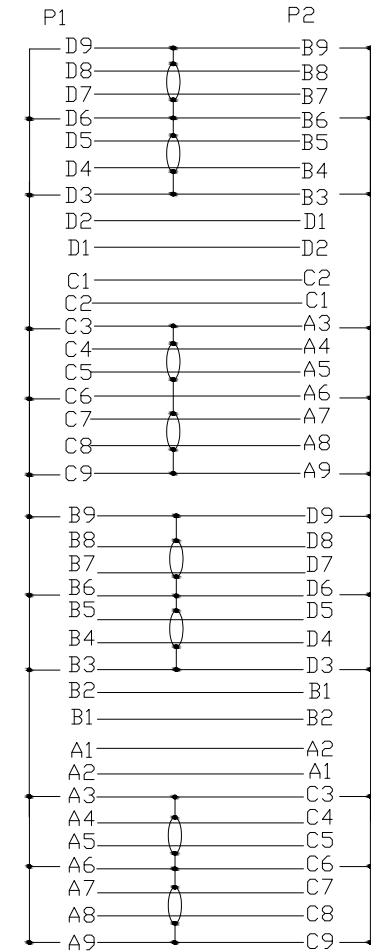

NOTE:
 1.100%OPEN&SHORT TESTIGN,
 2.INSULATION RESISTANCE 10M Ωhm MIN DC300V
 3.CONDUCTIVE RESISTANCE: 2 Ωhm MAX

10	COVER	AQ-3-MS64003	MINI SAS HD 4I SE COVER, PC BLACK	1	PCS
9	EXPAND	AQ-3-MS76001	PET BALCK OD: 10mm	A/R	mm
8	MOLDING	AQ-3-GL10501	PA BLACK	A/R	g
7	ACETATE TAPE	AQ-3-MS77001	W=25±5mm	A/R	mm
6	PCB	AQ-3-MS31023	MINI SAS HD 4I PCB(A/B),PIN: AU 15u&30u,100±10 ohm	2	PCS
5	PCB	AQ-3-MS31022	MINI SAS HD 4I PCB(C/D),PIN: AU 15u&30u,100±10 ohm	2	PCS
4	COVER	AQ-3-MS64002	MINI SAS HD 4I PC BLACK	1	PCS
3	HOUSING	AQ-3-MS64001	MINI SAS HD 4I PC BLACK	2	PCS
2	CABLE	AQ-3-MS20101	30AWG CABLE	A/R	mm
1	CABLE	AQ-3-MS40206	(30AWG*2C+2d)*Al+MYLAR,OD:0.97*2.17MM,100±10 ohm	A/R	mm
NO.	PART NAME	PART NO.	SPEC DESCRIPTION	QT'Y	UNIT

A	INITIAL RELEASE			13/03/02
REV	DESCRIPTION OF CHANGE			DATE
TOLERANCE INCHES		M/M	DIKWAN [®] DONGGGUAN AIQUN INDUSTRIAL CO., LTD.	
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05		
SCALE	NONE		REV	A
UNIT	MM			
DRAWN BY	TONY CHAN		SHEET	1/1
CHECK BY			DATE	22/06/27
TITLE: MINI SAS HD 4i TO 4i RA			DWG NO.:AQ13-021	
CUSTOMER. P/N:			P/N: AQ-1-MS331S010500	