




RoHS
compliant

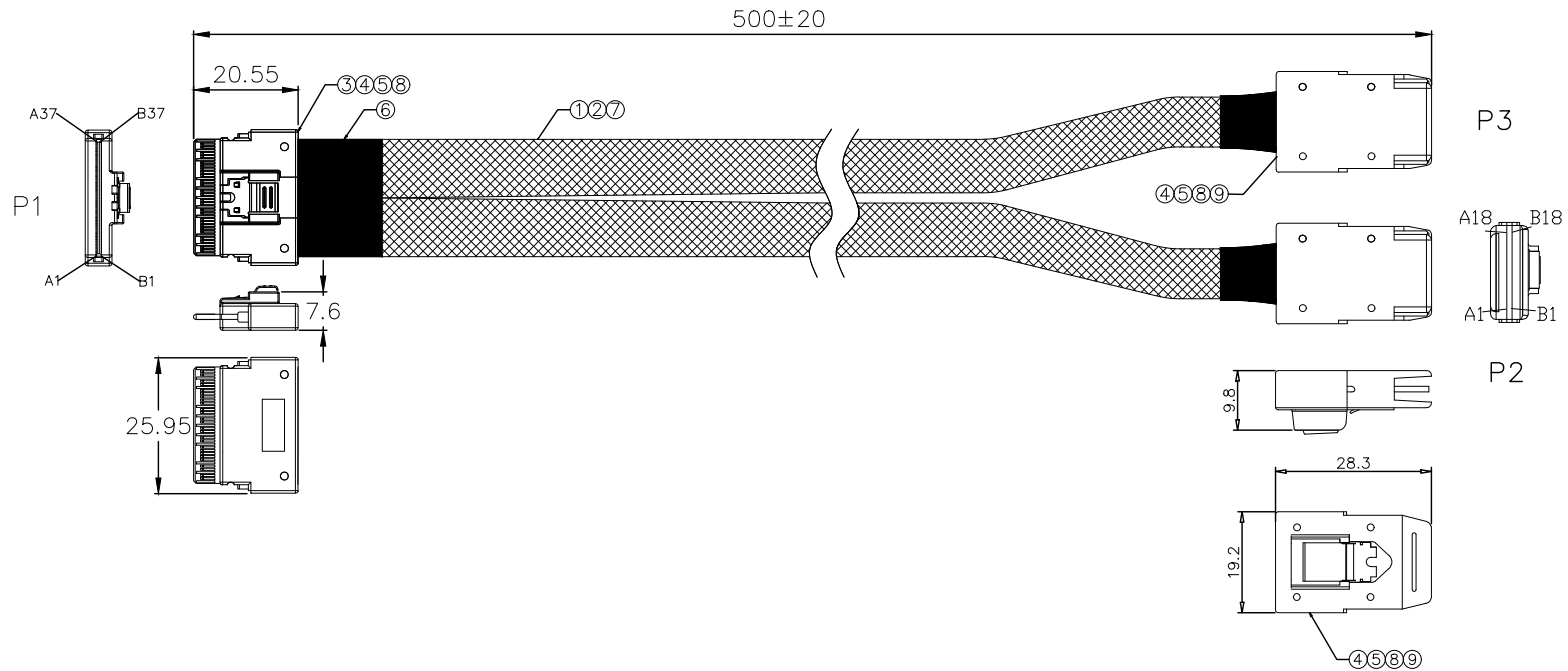

9	PCB	AQ-3-MS31022	MINISAS 36PIN PCB,PIN:Au 15u, 100±10 ohm	2	PCS
8	LATCH	AQ-3-MS21008	STAINLESS STEEL	3	PCS
7	EXPANDO	AQ-3-MS76001	PET BALCK DD: 10mm	A/R	mm
6	ACETATE TAPE	AQ-3-MS77001	W=25±5mm,BLACK	A/R	mm
5	MDL DING	AQ-3-GL100101	LDPE,NATURAL	A/R	9
4	MDL DING	AQ-3-GL100401	PBT+30GF% BLACK	A/R	9
3	PCBA	AQ-3-MS31027	SLIMSAS 8I PCB, PIN:15u&30u Au, 88±8 ohm	1	PCS
2	CABLE	AQ-3-MS40101	30AWG CABLE,DD:0.65	A/R	mm
1	CABEL	AQ-3-MS40208	<32AWG*2C+2D>AL+MYLAR,DD:0.65*1.54MM,85±5 ohm	A/R	mm
NO.	PART NAME	PART NO.	SPEC DESCRIPTION	QT'Y	UNIT

TOLERANCE			DICKWAN® DONGGUAN AIQUN INDUSTRIAL CO., LTD.	
INCHES	M/M		SCALE	NONE
.X	.015	.30	UNIT	MM
.XX	.010	.10	REV A0	
.XXX	.005	.05	DRAWN BY TONY CHAN	
CHECK BY LJF			SHEET 1/2	CUSTOMER:
APPD BY			DATE 19/03/06	DWG NO.:AQ03-0219A
CUSTOMER. P/N:			TITLE: SLIMSAS 8i TO 2*MINISAS 36P	
			P/N: AQ-1-MSA12010500	

RoHS
compliant

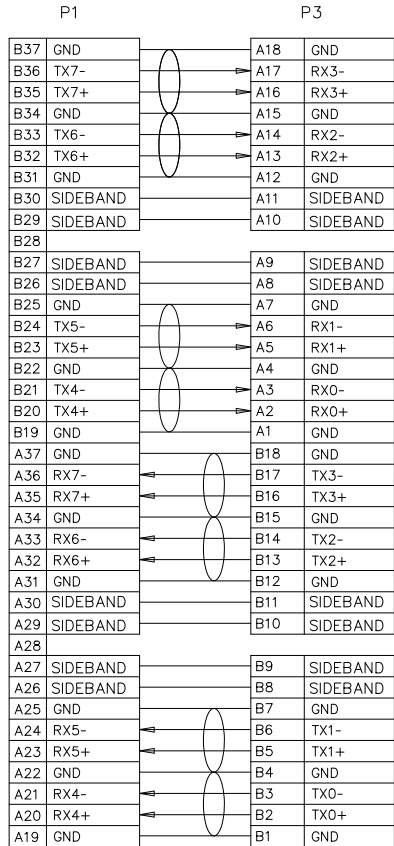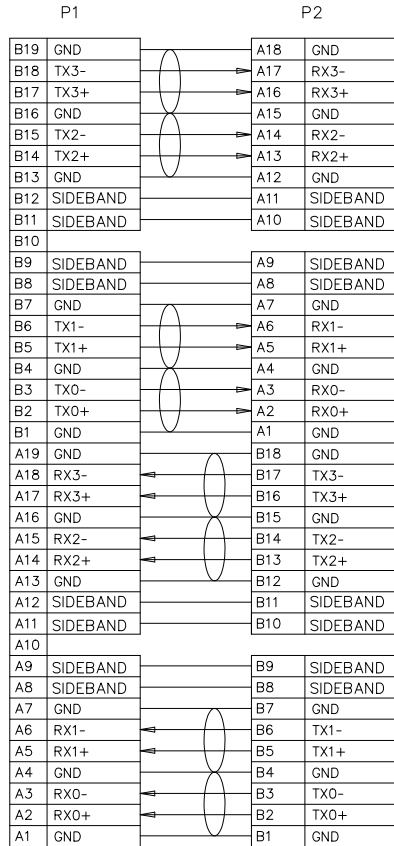

- ELECTRICAL CHARACTER:
- a. 100% OPEN&SHORT TESTING;
 - b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
 - c. INSULATION RESISTANCE:10M Ohm(Min);
 - d. CONDUCTIVE RESISTANCE:2 Ohm(Max).

TOLERANCE			INCHES		M/M		DIKWAN® DONGGUAN AIQUN INDUSTRIAL CO., LTD.				
.X	.015	.30					SCALE	NONE		REV	AO
.XX	.010	.10					UNIT	MM			
.XXX	.005	.05					SHEET	2/2	COSTOMER:		
DRAWN BY			TONY CHAN			DATE		19/03/06 DWG NO.:AQ03-0219A			
CHECK BY			LJF			APPD BY		TITLE: SLIMSAS 8I TO 2*MINISAS 36P			
CUSIOMER. P/N:						P/N: AQ-1-MSA12010500					