

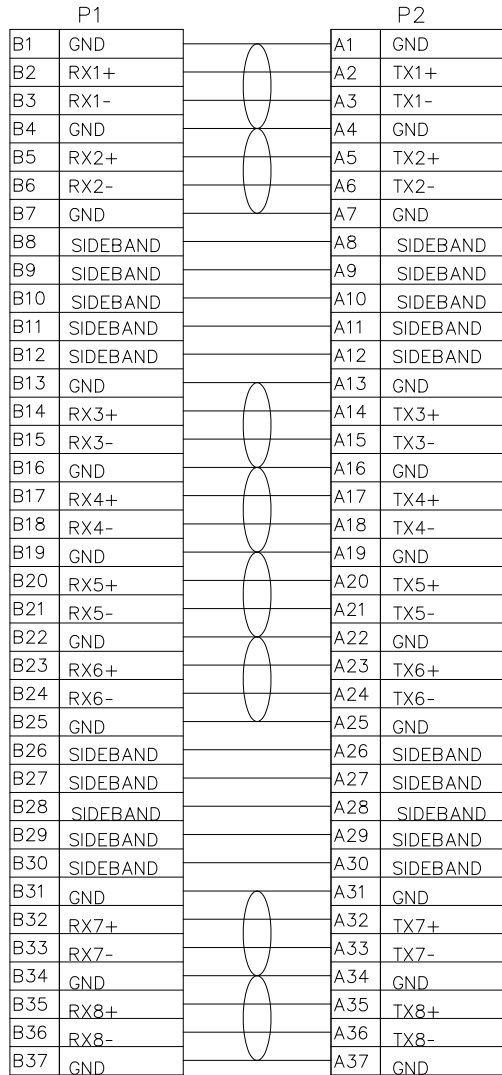


8	LATCH	AQ-3-MS21008	STAINLESS STEEL	2	pcs
7	EXPANDD	AQ-3-MS76001	PET BALCK DD: 10mm	A/R	mm
6	ACETATE TAPE	AQ-3-MS77001	W=25±5mm,BLACK	25	mm
5	MOLDING	AQ-3-GL100101	LDPE,NATURAL	A/R	9
4	MOLDING	AQ-3-GL100401	PBT+30GF% BLACK	A/R	9
3	PCBA	AQ-3-MS31027	SLIMSAS 8I PCB, PIN:15u&30u Au, 88±8 ohm	2	PCS
2	CABLE	AQ-3-MS40101	30AWG CABLE,DD:0.65	A/R	mm
1	CABEL	AQ-3-MS40208	(32AWG*2C+2D)AL+MYLAR,DD:0.65*1.54MM,85±5 ohm	A/R	mm
NO.	PART NAME	PART NO.	SPEC DESCRIPTION	QT'Y	UNIT

TOLERANCE			DIKWAN® DONGGUAN AIQUN INDUSTRIAL CO., LTD.				
INCHES	M/M						
.X	.015	.30	SCALE	NONE		REV	A0
.XX	.010	.10	UNIT	MM			
.XXX	.005	.05	DRAWN BY	TONY CHAN	SHEET	1/2	COSTOMER:
			CHECK BY	LJF	DATE	19/03/06	DWG NO.:AQ03-0219A
			APPD BY		TITLE: SLIMSAS 8i TO 8i CABLE		
			CUSIOMER. P/N:		P/N: AQ-1-MSAA1010500		

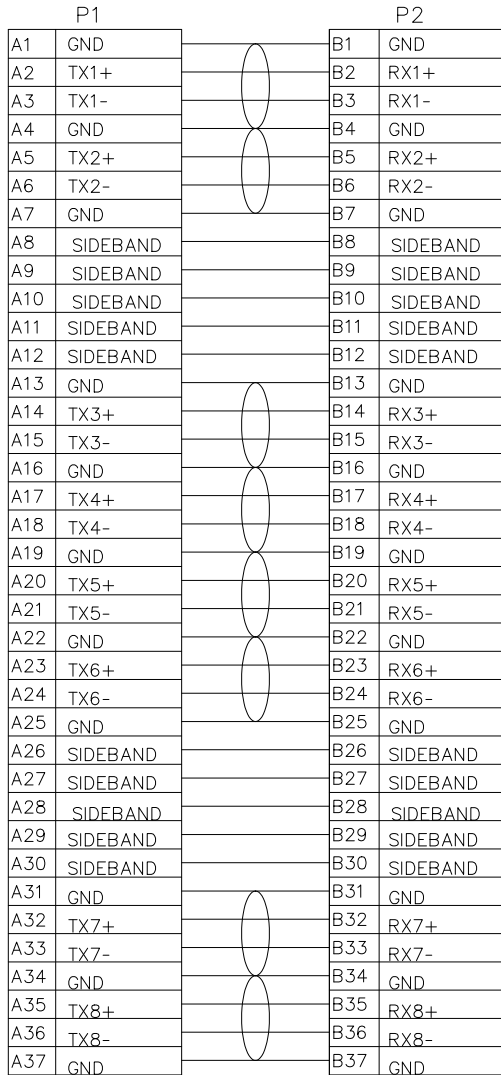

. ELECTRICAL CHARACTER:

- a. 100% OPEN&SHORT TESTING;
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- c. INSULATION RESISTANCE:10M Ohm(Min);
- d. CONDUCTIVE RESISTANCE:2 Ohm(Max).
- e.Impedance: 85 Ohm
- f.Electrical and mechanical performance should meet the PCIe4.0 industrial standard.

TOLERANCE INCHES			M/M			DIKWAN® DONGGUAN AIQUN INDUSTRIAL CO., LTD.				
.X	.015	.30				SCALE	NONE		REV	A0
.XX	.010	.10				UNIT	MM			
.XXX	.005	.05				DRAWN BY	TONY CHAN	SHEET	2/2	COSTOMER:
						CHECK BY	LJF	DATE	19/03/06	DWG NO.:AQ03-0219A
						APPD BY		TITLE: SLIMSAS 8i TO 8i CABLE		
						CUSIOMER. P/N:		P/N: AQ-1-MSAA1010500		