


- ELECTRICAL CHARACTER:
- a. 100% OPEN&SHORT TESTING;
  - b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
  - c. INSULATION RESISTANCE:10M Ohm(Min);
  - d. CONDUCTIVE RESISTANCE:2 Ohm(Max).

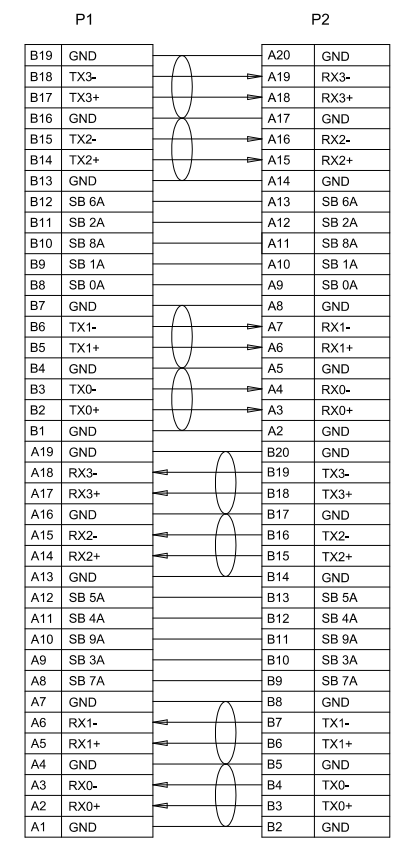

NO	PART NAME	PART NO.	SPEC DESCRIPTION	QTY	UNIT
12	CONN	AQ-3-MS51C02	OCULINK 4I CONN PIN:Au 30u	1	PCS
11	PCB	AQ-3-MS31022	OCULINK 4I PCB 88±8 ohm	1	PCS
10	HOOK	AQ-3-MS64002	OCULINK 4I HOOK_UP PC+ABS, BLACK	1	PCS
9	HOOK	AQ-3-MS64001	OCULINK 4I HOOK_DOWN PC+ABS, BLACK	1	PCS
8	LATCH	AQ-3-MS21008	STAINLESS STEEL	1	PCS
7	EXPANDO	AQ-3-MS76001	PET BALCK DD: 10mm	A/R	mm
6	ACETATE TAPE	AQ-3-MS77001	W=25±5mm,BLACK	A/R	mm
5	MOLDING	AQ-3-GL100101	LDPE,NATURAL	A/R	9
4	MOLDING	AQ-3-GL100401	PBT+30GF% BLACK	A/R	9
3	PCBA	AQ-3-MS31019	MINI SAS 36PIN PCB, PIN:15u&30u Au, 88±8 ohm	1	PCS
2	CABLE	AQ-3-MS40101	30AWG CABLE,DD:0.65	A/R	mm
1	CABEL	AQ-3-MS40208	32AWG*2C+2D)AL+MYLAR,DD:0.65*1.54MM,85±5 ohm.	A/R	mm

TOLERANCE			INCHES		M/M		DIKWAN® DONGGUAN AIQUN INDUSTRIAL CO., LTD.					
.X	.015	.30					SCALE	NONE		REV	A0	
.XX	.010	.10					UNIT	MM				
.XXX	.005	.05					DRAWN BY	TONY CHAN	SHEET	1/1	COSTOMER:	
CHECK BY							DATE	16/07/02	DWG NO.:AQ1607-0214A			
APPD BY							TITLE: SLIMSAS 4I TO OCULINK 4I					
							P/N: AQ-1-MS981010500					