


14	CABLE	AQ-3-MS40109	24AWG (RED/BLACK)	A/R	M
13	CABLE	AQ-3-MS40108	20AWG (RED/BLACK/YELLOW)	A/R	M
12	MOLDING	AQ-3-GL100101	LDPE,NATURAL	A/R	KG
11	MOLDING	AQ-3-GL145201	45P PVC BLACK	A/R	KG
10	MOLDING	AQ-3-GL100401	PBT+30GF% BLACK	A/R	KG
9	EXPANDD	AQ-3-MS76001	PET BALCK DD: 10mm	A/R	M
8	CONN.	AQ-3-MS51S02	15PIN SATA/M G/F BLACK	1	PCS
7	ACETATE TAPE	AQ-3-MS77001	W=25±5mm	A/R	M
6	LATCH	AQ-3-MS21008	STAINLESS STEEL	1	PCS
5	PCB	AQ-3-MS31019	SLIMSAS 8I PCB, PIN15u&30u Au, 88±8 ohm	1	PCS
4	CONN	AQ-3-MS51S05	SAS 68P/F PINAu 15u BLACK	2	PCS
3	PCB	AQ-3-MS31037	MINISAS 68P PCB, FR4, 88±8 ohm	2	PCS
2	CABLE	AQ-3-MS20101	30AWG CABLE	A/R	M
1	CABLE	AQ-3-MS40206	(32AVG*2C+2d)*AI+MYLAR,DD0.65*1.52MM,B5±5 ohm	A/R	M
NO.	NAME	P/N	MATERIAL DESCRIPTION	D'TY	UNIT

A	INITIAL RELEASE		20/03/16
REV	DESCRIPTION OF CHANGE		DATE
TOLERANCE INCHES MM			DIKWAN ® DONGGGUAN AIQUN INDUSTRIAL CO., LTD.
.X	.015	.030	
.XX	.010	.010	
.XXX	.005	.005	SCALE NONE UNIT MM Ⓢ
DRAWN BY	TONY CHAN		REV A
CHECK BY			SHEET 1/2 CUSTOMER:
CUSTOMER P/N:	P/N:AQ-1-MSA7H2E20500		DATE 22/03/16 DWG No: AQ1617
			TITLE: SLIMSAS 8I to SAS 68P+15P

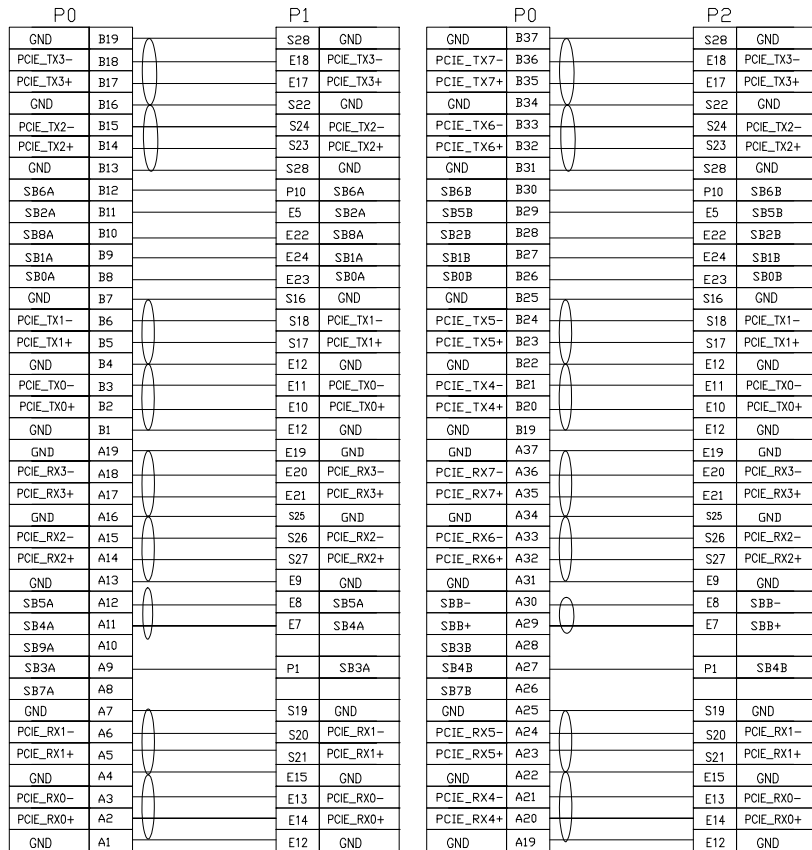

NOTE:
 1.100%OPEN&SHORT TESTIGN,
 2.INSULATION RESISTANCE 10M Ohm MIN DC300V
 3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

P1/P2	E3	P1	P2	P3	P4	P5	P6	P7	P8	P9		P12	P13	P14	P15
P3/P4	P1P2P3	----				P4P5P6			P7P8P9			P10P11P12			P13P14P15
SYMBOL	3.3V	----				GND			5V			GND			12V
WIRE AWG	24AWG	----				20AWG			20AWG			24AWG			20AWG

A	INITIAL RELEASE		20/03/16			
REV	DESCRIPTION OF CHANGE		DATE			
TOLERANCE INCHES MM						
.X	.015	.030	DIKWAN® DONGGGUAN AIQUN INDUSTRIAL CO., LTD.			
.XX	.010	.010				
.XXX	.005	.005				
DRAWN BY	TONY CHAN	SCALE	NONE	⊕	REV	A
		UNIT	MM			
CHECK BY		SHEET	2/2	CUSTOMER:		
		DATE	22/03/16	DWG No.:AQ1617		
CUSTOMER P/N:		TITLE:SLIMSAS 8I to SAS 68P+15P				
		P/N: AQ-1-MSA7H2E20500				