


P1		P2	
GND	B19	GND	A19
RX3-	B18	TX3-	A18
RX3+	B17	TX3+	A17
GND	B16	GND	A16
RX2-	B15	TX2-	A15
RX2+	B14	TX2+	A14
GND	B13	GND	A13
SB-	B12	SB-	A12
SB+	B11	SB+	A11
GND	B10	GND	A10
SB-	B9	SB-	A9
SB+	B8	SB+	A8
GND	B7	GND	A7
RX1-	B6	TX1-	A6
RX1+	B5	TX1+	A5
GND	B4	GND	A4
RX0-	B3	TX0-	A3
RX0+	B2	TX0+	A2
GND	B1	GND	A1
GND	A19	GND	B19
TX3-	A18	RX3-	B18
TX3+	A17	RX3+	B17
GND	A16	GND	B16
TX2-	A15	RX2-	B15
TX2+	A14	RX2+	B14
GND	A13	GND	B13
SB-	A12	SB-	B12
SB+	A11	SB+	B11
GND	A10	GND	B10
SB-	A9	SB-	B9
SB+	A8	SB+	B8
GND	A7	GND	B7
TX1-	A6	RX1-	B6
TX1+	A5	RX1+	B5
GND	A4	GND	B4
TX0-	A3	RX0-	B3
TX0+	A2	RX0+	B2
GND	A1	GND	B1

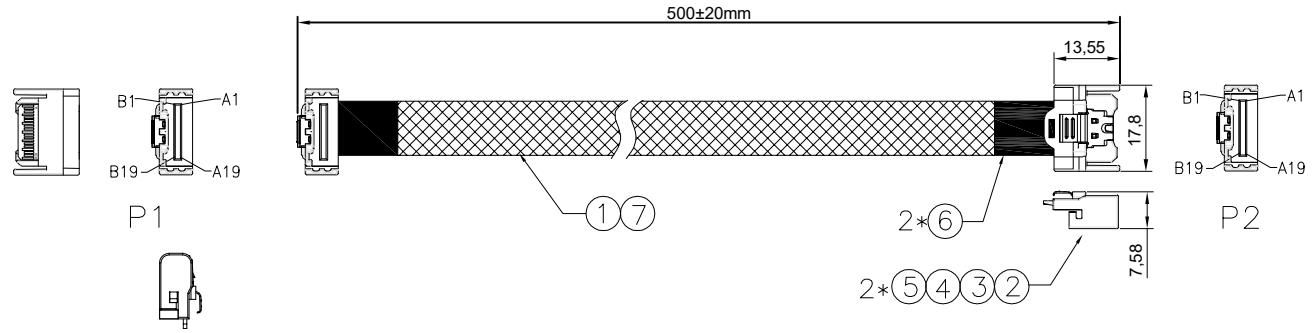

- ELECTRICAL CHARACTER:
- a. 100% OPEN&SHORT TESTING;
  - b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
  - c. INSULATION RESISTANCE:10M Ohm(Min);
  - d. CONDUCTIVE RESISTANCE:2 Ohm(Max).
  - e.Impedance: 85 Ohm
  - f.Electrical and mechanical performance should meet the PCIE5.0 industrial standard.

NO.	PART NAME	Q'TY	UNITS
7	EXPANDO	PET BALCK DD: 10mm	A/R M
6	ACETATE TAPE	W=25±5mm,BLACK	A/R M
5	MOLDING	PA,BALCK	A/R g
4	HUUSING	PA66+30%GF,BALCK	1 PCS
3	PCB	MCIO 4X PCB,, 88±8 ohm	1 PCS
2	LATCH	STAINLESS STEEL	2 PCS
1	CABEL	<30AWG*2C+2D>AL+MYLAR,DD:1.0*1.85MM,85±5 ohm	A/R M

TOLERANCE INCHES		M/M		DIKWAN® DONGGUAN AIQUN INDUSTRIAL CO., LTD.	
.X	.015	.30		SCALE	NONE
.XX	.010	.10		UNIT	MM
.XXX	.005	.05		SHEET	1/1
DRAWN BY TONY CHAN		DATE 23/11/02		REV	A0
CHECK BY		DWG NO.:AQ1607-0214A		COSTUMER:	
APPD BY		TITLE: MCIO 4X TO MCIO 4X			
CUSTOMER. P/N:		P/N: AMSFF0110001			