


MCIO 4X Dust Cap

NOTE:
 1.100%OPEN、SHORT、TESTING,
 2.INSULATION RESISTANCE: 10M Ohm MIN DC: 300V
 3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

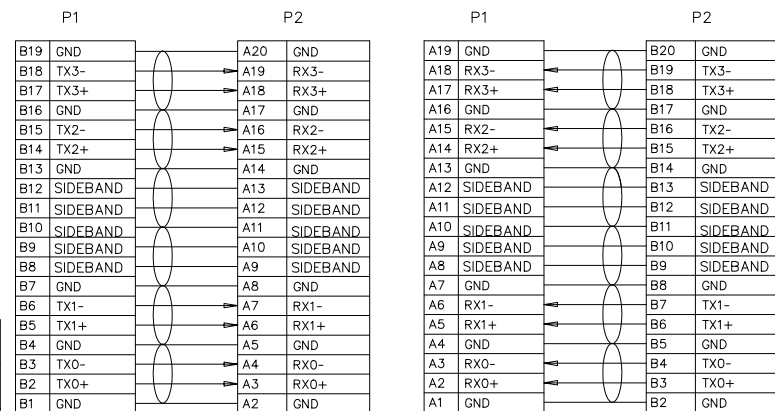

NO.	PART NAME	SPEC DESCRIPTION	QTY	UNIT
10	EXPANDO	PET, BALCK,OD: 10mm,	A/R	mm
9	MOLDING	PA,BLACK	A/R	g
8	ACETATE TAPE	W=25±5mm	A/R	mm
7	HOOK	OCULINK 4X, PC+ABS+30%GF	1	PCS
6	HOOK	OCULINK 4X, PC+ABS+30%GF	1	PCS
5	PCB	OCULINK 4X PCB, , 88±8 ohm	1	PCS
4	COVER	MCIO 4X, PA66+20%GF	1	PCS
3	PCB	MCIO 4X PCB, , 88±8 ohm	1	PCS
2	LATCH	STAINLESS STEEL	1	PCS
1	CABLE	30AWGx2C+2D+AL+Mylay,OD1.0*1.85mm 85±10 ohm	A/R	mm

A	INITIAL RELEASE		24/4/3	
REV	DESCRIPTION OF CHANGE			DATE
TOLERANCE		OIKWAN 东莞市嵩群实业有限公司		
INCHES		DONGGGUAN OIKWAN INDUSTRIAL CO., LTD.		
M/M		SCALE	NONE	REV
.X	.015	.30	UNIT	MM
.XX	.010	.10	SHEET 1/1	
.XXX	.005	.05	DATE 24/5/10	
DRAWN BY TONY CHAN		COSTOMER:		
CHECK BY		DWG NO.:AQ3-021		
CUSTOMER. P/N:		TITLE: MCIO 4X-OCULINK 8611		
P/N: AMSF80010001				