


MCIO 4X Dust Cap

SLIMSAS 4i Dust Cap

NOTE:

- 1.100%OPEN、SHORT、TESTING、
- 2.INSULATION RESISTANCE: 10M Ohm MIN DC: 300V
- 3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

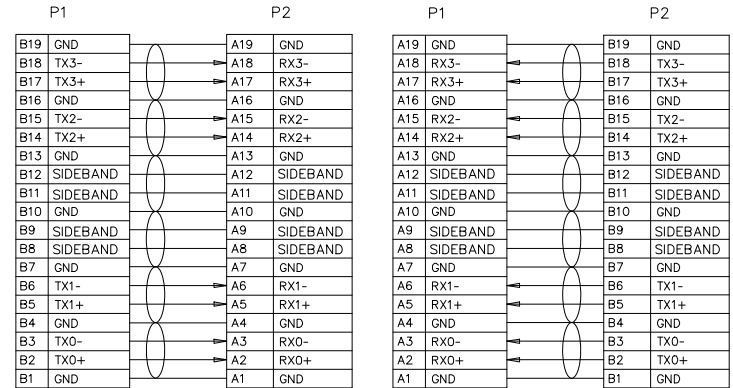

NO.	PART NAME	SPEC DESCRIPTION	QTY	UNIT
10	EXPANDO	PET,BLACK OD: 10mm	A/R	mm
9	MOLDING	PA,BLACK	A/R	g
8	ACETATE TAPE	W=25±5mm	A/R	mm
7	MOLDING	PBT-RG30+30%GF,BLACK	A/R	g
6	MOLDING	LDPE,NATURAL	A/R	g
5	PCB	SLIMSAS 4i PCB, FR4,88±8 ohm	1	PCS
4	COVER	MCIO 4X, PA66+20%GF	1	PCS
3	PCB	MCIO 4X PCB, , 88±8 ohm	1	PCS
2	LATCH	STAINLESS STEEL	2	PCS
1	CABLE	30AWGx2C+2D+AL+Mylay,OD1.0*1.85mm 85±10 ohm	A/R	mm

A	INITIAL RELEASE		24/4/3	
REV	DESCRIPTION OF CHANGE			DATE
	TOLERANCE			
	INCHES	M/M		
	.X	.015	.30	
	.XX	.010	.10	
	.XXX	.005	.05	
DRAWN BY	TONY CHAN			
CHECK BY				
CUSTOMER. P/N:		P/N: AMSF90010001		

OIKWAN 东莞市莞群实业有限公司
DONGGGUAN OIKWAN INDUSTRIAL CO., LTD.

SCALE NONE UNIT MM

SHEET 1/1 SHEET COSTOMER:

DATE 24/5/10 DWG NO.:AQ13-021

TITLE: MCIO 4X-SLIMSAS 4i