


MCIO 4XDust Cap

P2	P3	CABLE
E3	1+2+3	AWG24
P5+P6	4+5+6	AWG20
P7+P8+P9	7+8+9	AWG20
P12	10+11+12	AWG24
P13+P14+P15	13+14+15	AWG20

NOTE:
 1.100%OPEN、SHORT、TESTING,
 2.INSULATION RESISTANCE: 10M Ohm MIN DC: 300V
 3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

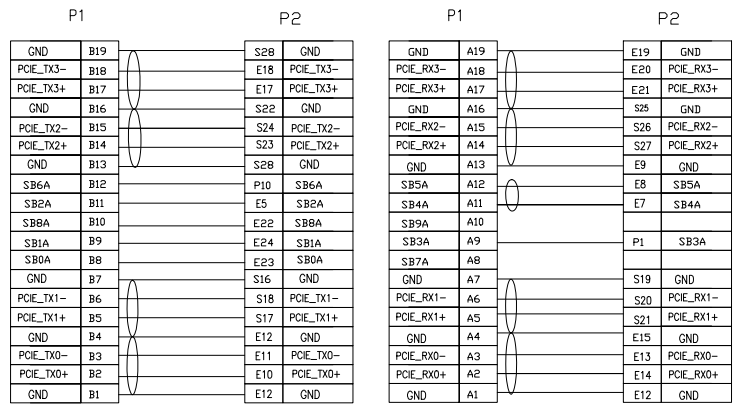

NO.	PART NAME	SPEC DESCRIPTION	QTY	UNIT
14	EXPANDO	PET, BLACK OD: 10mm,	A/R	mm
13	ACETATE TAPE	W=25±5mm	A/R	mm
12	CONN.	SATA 15P/M G/F BLACK	1	PCS
11	CONN.	SAS 68P/F BLACK	1	PCS
10	PCB	8639 PCB, FR4, 88±8 ohm	1	PCS
9	MOLDING	45P PVC, BLACK	A/R	g
8	MOLDING	LDPE, NATURAL	A/R	g
7	MOLDING	PA, BLACK	A/R	g
6	COVER	MCIO 4X, PA66+20%GF	1	PCS
5	PCB	MCIO 4X PCB, , 88±8 ohm	1	PCS
4	LATCH	STAINLESS STEEL	1	PCS
3	CABLE	AWG20/AWG24, PVC	A/R	mm
2	CABLE	30AWG, OD: 0.7mm, PVC	A/R	mm
1	CABLE	30AWGx2C+2D+AL.mylay+amylay, OD: 0.8x1.76, 85±5 ohm	A/R	mm

REV	DESCRIPTION OF CHANGE	DATE								
A	INITIAL RELEASE	24/4/3								
<table border="1"> <thead> <tr> <th>TOLERANCE INCHES</th> <th>M/M</th> </tr> </thead> <tbody> <tr> <td>.X</td> <td>.015 .30</td> </tr> <tr> <td>.XX</td> <td>.010 .10</td> </tr> <tr> <td>.XXX</td> <td>.005 .05</td> </tr> </tbody> </table>			TOLERANCE INCHES	M/M	.X	.015 .30	.XX	.010 .10	.XXX	.005 .05
TOLERANCE INCHES	M/M									
.X	.015 .30									
.XX	.010 .10									
.XXX	.005 .05									
DRAWN BY TONY CHAN		CUSTOMER. P/N:								
CHECK BY		P/N: AMSF70010001								

OIKWAN 东莞市莞群实业有限公司
 DONGGGUAN AIQUN INDUSTRIAL CO., LTD.

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/1	COSTOMER:	
DATE	24/5/10	DWG NO.:AQ13-021	

TITLE: MCIO 4X-8639