
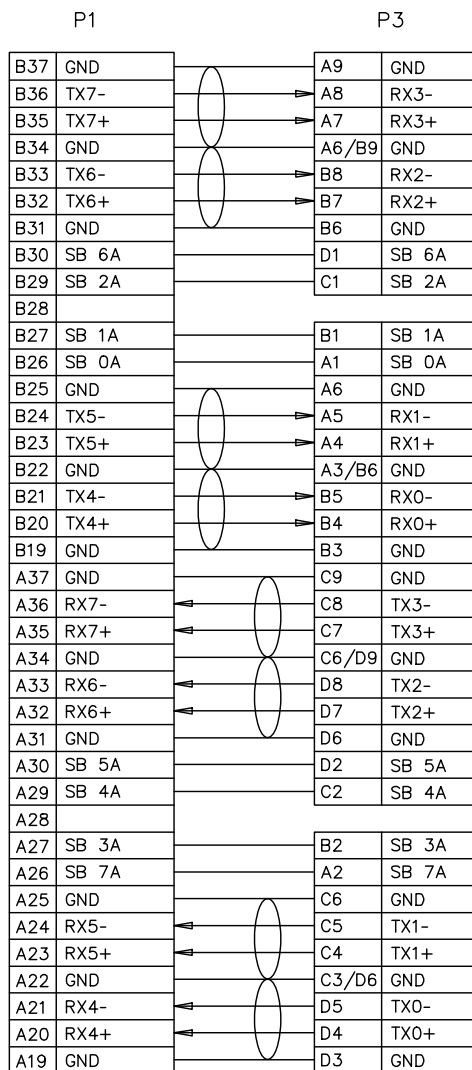


ELECTRICAL CHARACTER:

- a. 100% OPEN&SHORT TESTING;
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- c. INSULATION RESISTANCE:10M Ohm(Min);
- d. CONDUCTIVE RESISTANCE:2 Ohm(Max).

TOLERANCE							
	INCHES	M/M					
.X	.015	.30	OIKWAN • 东莞市嵩群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO., LTD.				
.XX	.010	.10					
.XXX	.005	.05					
DRAWN BY	TONY CHAN		SCALE	NONE		REV	A0
CHECK BY	LJF		UNIT	MM			
APPD BY			SHEET	1/2	COSTOMER:		
CUSTOMER. P/N:			DATE	23/09/22	DWG NO.:M1703-0321A		
			TITLE: MCIO 8X TO 2*8643				
			P/N: AMSE30010004				

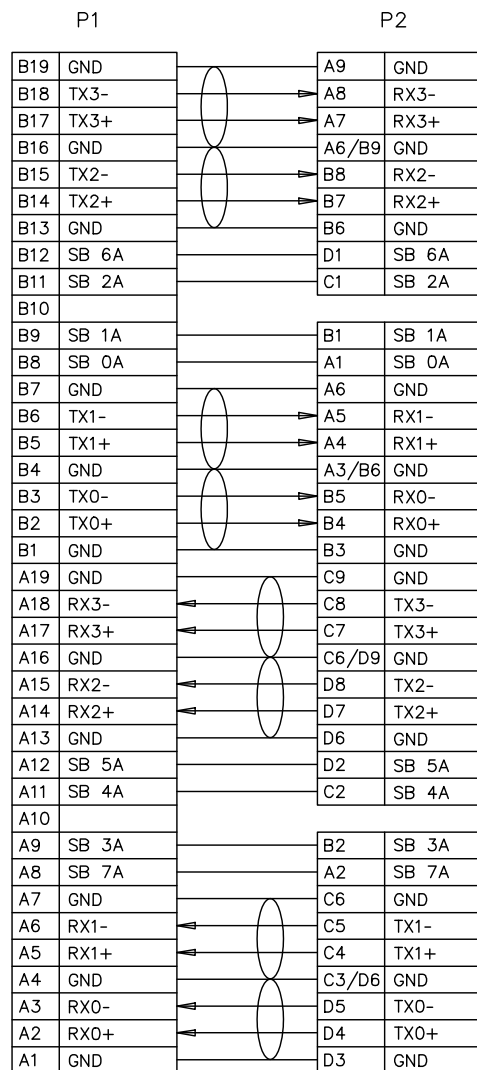

12	HOUSING	MINI SAS HD 4i PC BLACK	2	PCS
11	COVER	MINI SAS HD 4i PC BLACK	2	PCS
10	PCB	MINISAS HD 4i PCB(C/D), 100±10 ohm	2	PCS
9	PCB	MINISAS HD 4i PCB(A/B), 100±10 ohm	2	PCS
8	EXPANDED	PET, BLACK	A/R	M
7	ACETATE TAPE	W=25±5mm, BLACK	A/R	M
6	MOLDING	PA, BLACK	A/R	g
5	COVER	MCIO 8X PA66+20%GF BLACK	A/R	g
4	PCB	MCIO 8X PCB, FR4, AU 30u, 88±8 ohm	1	PCS
3	LATCH	STAINLESS STEEL	1	PCS
2	CABLE	UL1061 30AWG OD: 0.65mm	A/R	M
1	CABLE	30AWGx2C+2D+al.mylay+amylay, OD: 0.8x1.76, 85±5 ohm	A/R	M
NO.	NAME	DESCRIPTION	Q'TY	UNITS

TOLERANCE			INCHES		M/M		OIKWAN • 东莞市嵩群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO., LTD.					
.X	.015	.30					SCALE	NONE		REV	A0	
.XX	.010	.10					UNIT	MM				
.XXX	.005	.05					SHEET	2/2		CUSTOMER:		
DRAWN BY			TONY CHAN				DATE	23/09/22	DWG NO.: M1703-0321A			
CHECK BY			LJF				TITLE: MCIO 8X TO 2*8643					
APPD BY							CUSTOMER. P/N: P/N: AMSE3001004					