


NOTE:  
 1.100%OPEN&SHORT TESTIGN,  
 2.INSULATION RESISTANCE 10M Ohm MIN DC300V  
 3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

WIRING TABLE

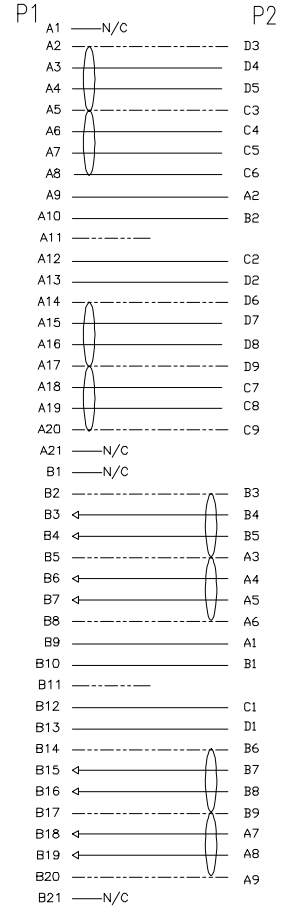

14	MOLDING	AQ-3-GL10501	PA BLACK	A/R	9
13	PCB	AQ-3-MS31023	MINI SAS HD 4I PCB(A/B),PIN: AU 15u&30u,100±10 ohm	1	PCS
12	PCB	AQ-3-MS31022	MINI SAS HD 4I PCB(C/D),PIN: AU 15u&30u,100±10 ohm	1	PCS
11	COVER	AQ-3-MS64002	MINI SAS HD 4I PC BLACK	1	PCS
10	HOUSING	AQ-3-MS64001	MINI SAS HD 4I PC BLACK	1	PCS
9	EXPANDD	AQ-3-MS76001	PET BALCK OD: 10mm	A/R	mm
8	MOLDING	AQ-3-GL10101	LDPE NATURAL	A/R	9
7	ACETATE TAPE	AQ-3-MS77001	W=25±5mm	A/R	mm
6	CONN	AQ-3-MS51C02	OCULINK 4I CONN PIN:AU 15u	1	PCS
5	PCB	AQ-3-MS31022	OCULINK 4I PCB 88±8 ohm	1	PCS
4	HOOK	AQ-3-MS64002	OCULINK 4I HOOK_UP PC+ABS, BLACK	1	PCS
3	HOOK	AQ-3-MS64001	OCULINK 4I HOOK_DOWN PC+ABS, BLACK	1	PCS
2	CABLE	AQ-3-MS20101	30AWG CABLE	A/R	mm
1	CABLE	AQ-3-MS40207	SAS4.0,UL20744(32AWG*2C+2D)+AM,BLUE,85±5 ohm	A/R	mm
NO.	PART NAME	PART NO.	SPEC DESCRIPTION	QT'Y	UNIT

A	INITIAL RELEASE		20/06/27
REV	DESCRIPTION OF CHANGE		DATE
TOLERANCE INCHES		M/M	DIKWAN® DONGGGUAN AIQUN INDUSTRIAL CO., LTD.
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	
DRAWN BY	TONY CHAN	SCALE	NONE
CHECK BY		UNIT	MM
		SHEET	1/1
DATE		22/06/27	DWG NO: AQ13-021
TITLE		OCULINK 4I TO MINISAS HD 4I	
CUSTOMFR P/N		P/N: AQ-1-MS831010500	