










RoHS

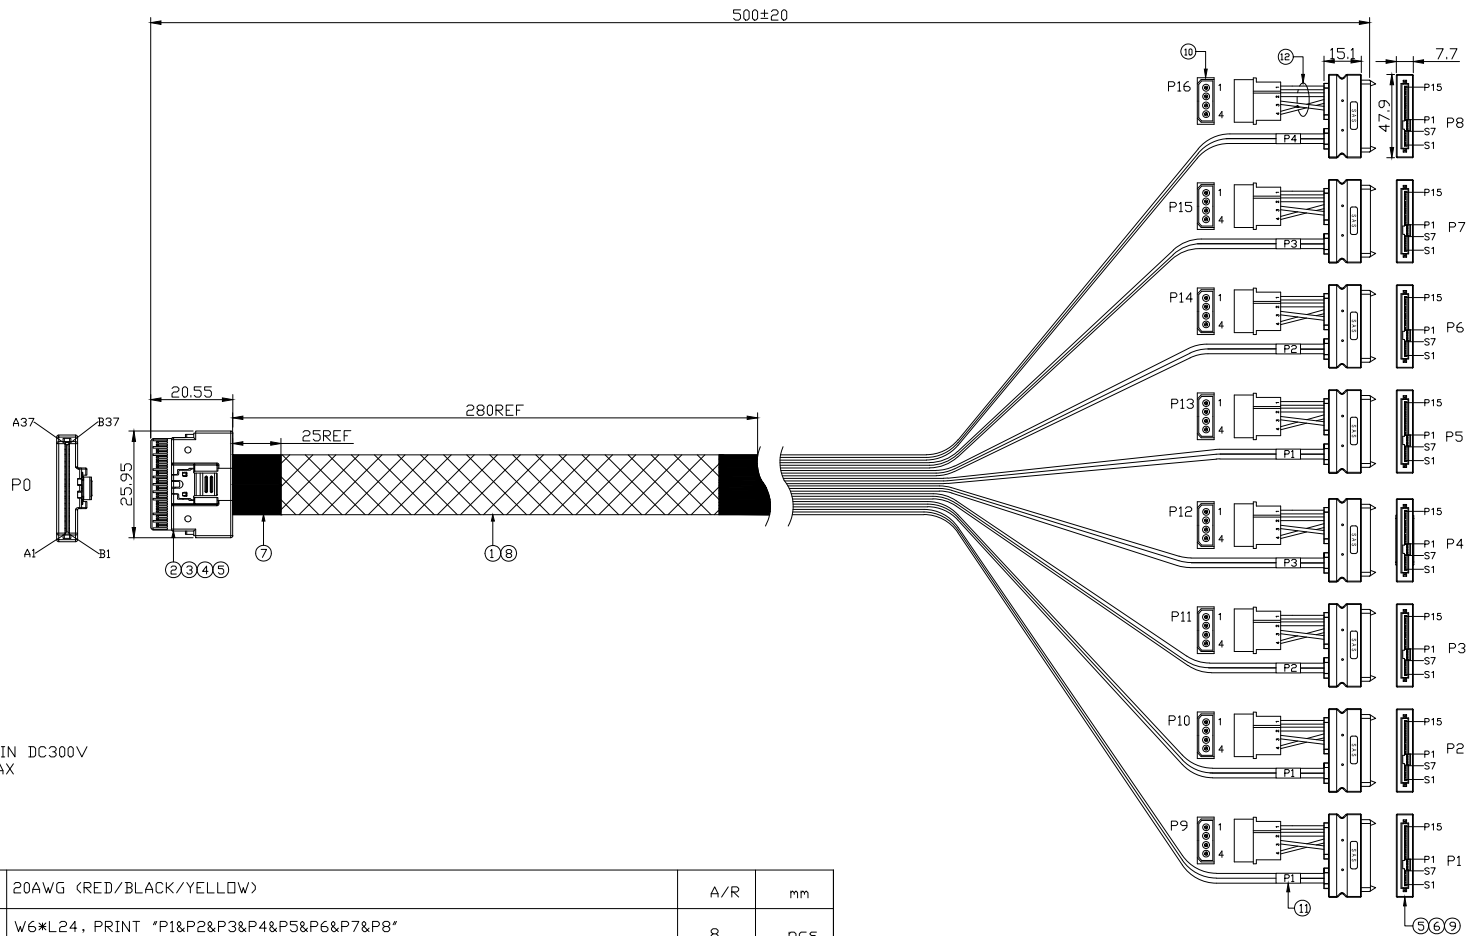

NOTE:  
 1.100%OPEN&SHORT TESTIGN,  
 2.INSULATION RESISTANCE 10M Ohm MIN DC300V  
 3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

12	CABLE	AQ-3-MS40108	20AWG (RED/BLACK/YELLOW)	A/R	mm
11	LABLE	AQ-5-MS5039	W6*L24, PRINT 'P1&P2&P3&P4&P5&P6&P7&P8'	8	pcs
10	CONN.	AQ-3-GL51S03	4P,NATURAL,PH5.08,PIN:G/F	8	pcs
9	CONN.	AQ-3-GL51S01	SAS 29P/F,PIN:G/F	8	pcs
8	EXPANDD	AQ-3-MS76001	PET BALCK OD: 10mm	A/R	mm
7	ACETATE TAPE	AQ-3-MS77001	W=25±5mm,BLACK	2	pcs
6	MOLDING	AQ-3-GL145201	45P PVC BLACK	A/R	g
5	MOLDING	AQ-3-GL100101	LDPE,NATURAL	A/R	g
4	MOLDING	AQ-3-GL100401	PBT+30%GF BLACK	A/R	g
3	LATCH	AQ-3-MS21008	STAINLESS STEEL	1	pcs
2	PCB	AQ-3-MS31019	SLIMSAS 8I PCB, PIN:Au 15u&30u, 88±8 ohm	1	PCS
1	CABLE	AQ-3-MS40208	(32AWG*2C+2d)*AL+MYLAR,OD:0.67*1.54MM,85±5 ohm.	A/R	mm
NO.	PART NAME	PART NO.	SPEC DESCRIPTION	QT'Y	UNIT

A	INITIAL RELEASE		13/03/02	
REV	DESCRIPTION OF			DATE
TOLERANCE		CHANGE		<b>DIKWAN</b> <sup>®</sup> DONGGUAN AIQUN INDUSTRIAL CO., LTD. SCALE NONE UNIT MM SHEET 1/2 CUSTOMER: DATE 21/11/22 DWG NO.: TITLE: SLIMSAS 8I TO 8*29P + 4P
INCHES				
MM .X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY	TONY CHAN		REV	A
CHECK BY			CUSTOMER P/N: P/N: AQ-1-MSA5810500	



A1, A4, A7, A13, A16, A19, A22, A25, A31, A34,  
B1, B4, B7, B13, B16, B19, B22, B25, B31, B34,

A	INITIAL RELEASE		13/03/02			
REV	DESCRIPTION OF			DATE		
TOLERANCE		CHANGE		<b>DIKWAN</b> <sup>®</sup> DONGGUAN AIQUN INDUSTRIAL CO., LTD.		
INCHES						
MM	.X	.015	.30			
	.XX	.010	.10			
	.XXX	.005	.05			
DRAWN BY	TONY CHAN	SCALE	NONE		REV	A
		UNIT	MM			
CHECK BY		SHEET	2/2	COSTOMER:		
		DATE	21/11/22	DWG NO.:		
		TITLE: SLIMSAS 8I TO 8*29P + 4P				
CUSTOMER P/N:			P/N: AQ-1-MSA5810500			