

100G QSFP28 to 2x 50G QSFP28 Copper Breakout Cable Assembly

CAB-ZQP / 2ZQP-PxM

Features

- Compliant with SFF-8665
- Compliant with IEEE 802.3bj
- Up to 100Gb/s data rates
- Ultra low crosstalk for improved performance
- Low insertion loss
- BER better than 10⁻¹⁵
- Serial numbers printed on each end
- Tested in an end-to-end system
- RoHS compliant



Applications

- Low EMI radiation Switches, servers and routers
- Data Center networks
- Storage area networks
- High performance computing
- Telecommunication and wireless infrastructure
- Medical diagnostics and networking
- Test and measurement equipment

Product Description

OIKWAN CAB-ZQP/2ZQP-PxM provide robust connections for leading edge 100Gb/s systems. Passive copper cables require no additional power to ensure quality connectivity. The 100Gb/s passive copper cables are fully compliant with SFF-8436 specification and provide connectivity between devices using QSFP28 ports. OIKWAN CAB-ZQP/2ZQP-PxM fill the need for short, cost-effective connectivity in the data center.

OIKWAN high-quality solutions provide a power-efficient replacement for active power connectivity such as fiber optic cables for short distances. Optimizing systems to operate with OIKWAN CAB-ZQP/2ZQP-PxM significantly reduces power consumption and EMI emission.

Recommended Operation Condition

Parameter	Symbol	Min	Max	Unit
Operating Case Temperature	Topc	0	70	degC
Storage Temperature	Tst	-40	125	degC
Relative Humidity (non-condensation)	RS	-	85	%
Supply Voltage	VCC3	3.135	3.465	V
Voltage on LVTTTL Input	Vilvttl	-0.3	VCC3 +0.2	V
Power Supply Current	ICC3	0.001	-	mA
Total Power Consumption	Pd	-	0.003	W

Notes:

Stress or conditions exceed the above range may cause permanent damage to the device.

This is a stress rating only and functional operation of the device at these or any other conditions above those listed in the operational sections of this specification is not applied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Time Domain

Item	Test Parameter	Specification (Proposal)
1	Intra-Skew* 1M 2M 3M 5M	20ps Max 25ps Max 30ps Max 40ps Max
2	Impedance Rise time: 14ps (20%~80%)	100 +/- 10 Ohm
3	Insertion Loss*	a) 0.6GHz : -2.11 dB Max

	(SDD21)for 1M	b) 1.25GHz : -2.88 dB Max c) 2.50GHz : -3.78 dB Max d) 3.25GHz : -4.95 dB Max e) 5.0GHz : -5.82 dB Max
	Insertion Loss* (SDD21) for 2M	a) 0.6GHz : -2.32 dB Max b) 1.25GHz : -3.76 dB Max c) 2.50GHz : -5.26 dB Max d) 3.25GHz : -7.2 dB Max e) 5.0GHz : -8.16 dB Max
	Insertion Loss* (SDD21) for 3M	a) 0.6GHz : -2.86 dB Max b) 1.25GHz : -4.24 dB Max c) 2.50GHz : -6.02 dB Max d) 3.25GHz : -6.99 dB Max e) 5.0GHz : -9.50 dB Max
	Insertion Loss* (SDD21) for 5M	a) 0.6GHz : -4.15 dB Max b) 1.25GHz : -6.37 dB Max c) 2.50GHz : -9.14 dB Max d) 3.25GHz : -10.5 dB Max e) 5.0GHz : -14.15 dB Max


* Notes:

*The item 1 and 3, for different length requirements, different specification


Frequency Domain

Item	Test Parameter	IEEE802.3bj Specification
1	Differential Insertion Loss (SDD12)	Maximum insertion loss at 12.8906Ghz -22.48dB Minimum insertion loss at 12.8906Ghz -8dB
2	Differential Insertion Loss (SDD21)	Maximum insertion loss at 12.8906Ghz -22.48dB Minimum insertion loss at 12.8906Ghz -8dB
3	Differential Return Loss (SDD22)	-16.5+2xSQRT(f) @ 0.01 to 4.1GHz -10.66+14xLog10(f/5.5) @4.1 to 19GHz
4	Differential Return Loss (SDD11)	-16.5+2xSQRT(f) @ 0.01 to 4.1GHz -10.66+14xLog10(f/5.5) @4.1 to 19GHz
5	Common Mode Reflection (SCC22)	-2dB @ 0.01 to 19GHz
6	Common Mode Reflection (SCC11)	-2dB @ 0.01 to 19GHz
7	Common Mode Conversion (SCD22)	-22+(20/25.78)*(f) @ 0.01 to 12.89GHz -15+(6/25.78)*(f) @ 12.9 to 19GHz
8	Common Mode Conversion (SCD11)	-22+(20/25.78)*(f) @ 0.01 to 12.89GHz -15+(6/25.78)*(f) @ 12.9 to 19GHz
9	Differential to Common Mode Conversion Loss (SCD12)	-10dB @ 0.01 to 12.89GHz -27+(29/22)*(f) @ 12.9 to 15.7GHz -6.3dB @ 15.71 to 19GHz
10	Differential to Common Mode Conversion Loss (SCD21)	-10dB @ 0.01 to 12.89GHz -27+(29/22)*(f) @ 12.9 to 15.7GHz -6.3dB @ 15.71 to 19GHz


Typical Operation Characteristics

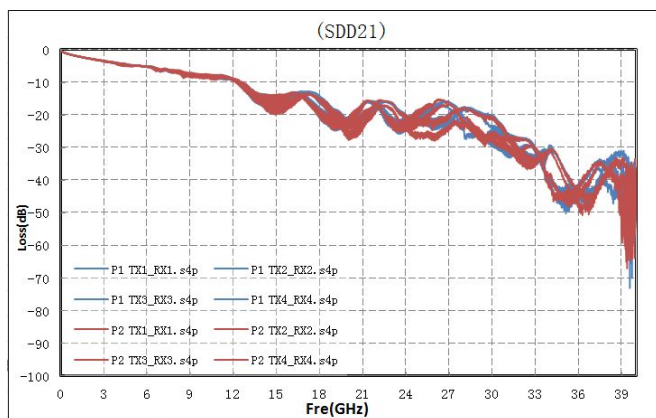


ZQP-2ZQP 30AWG 1M

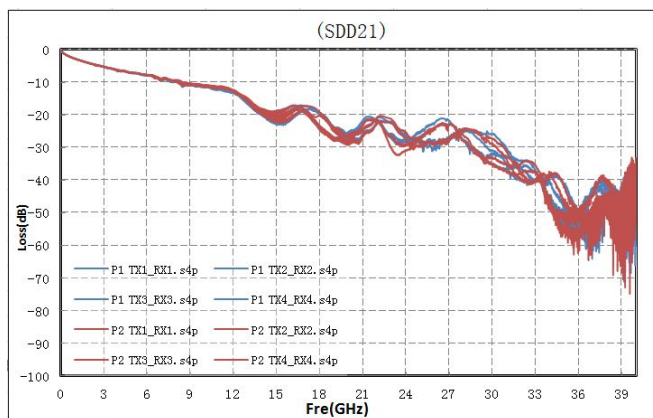


ZQP-2ZQP 30AWG 2M

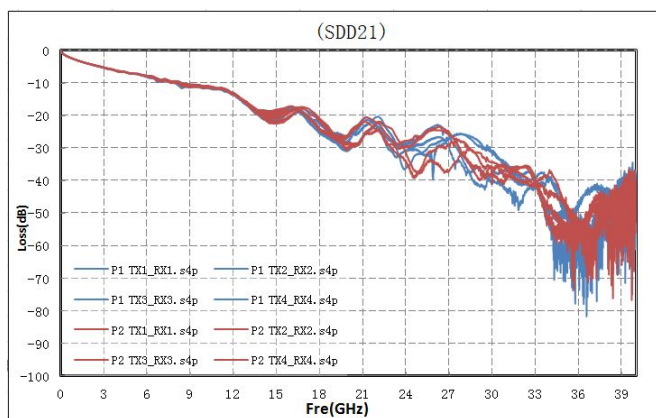

ZQP-2ZQP 26AWG 3M

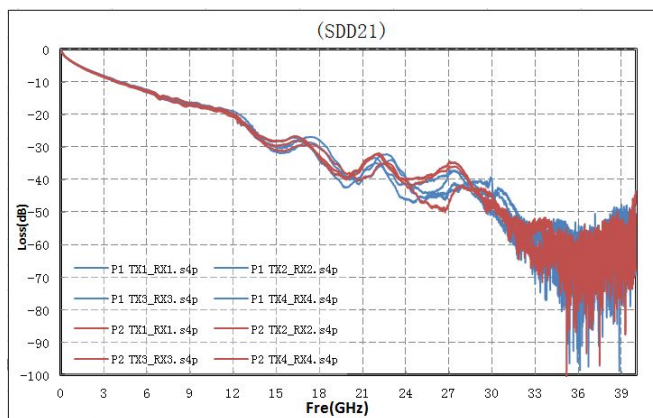

ZQP-2ZQP 26AWG 5M

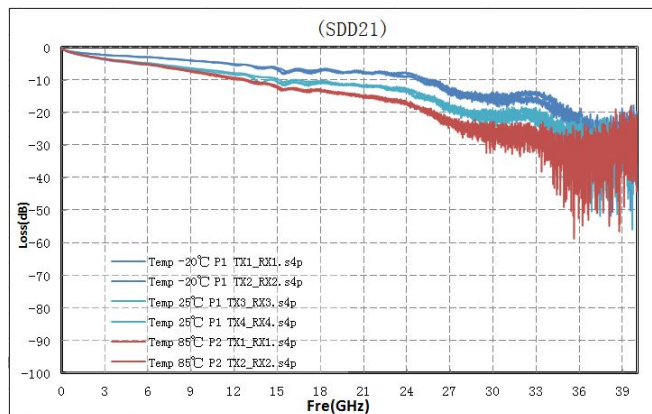

Temperature test data (26AWG 3M)

Host board Connector Pinout

Figure 1: MSA compliant Connector

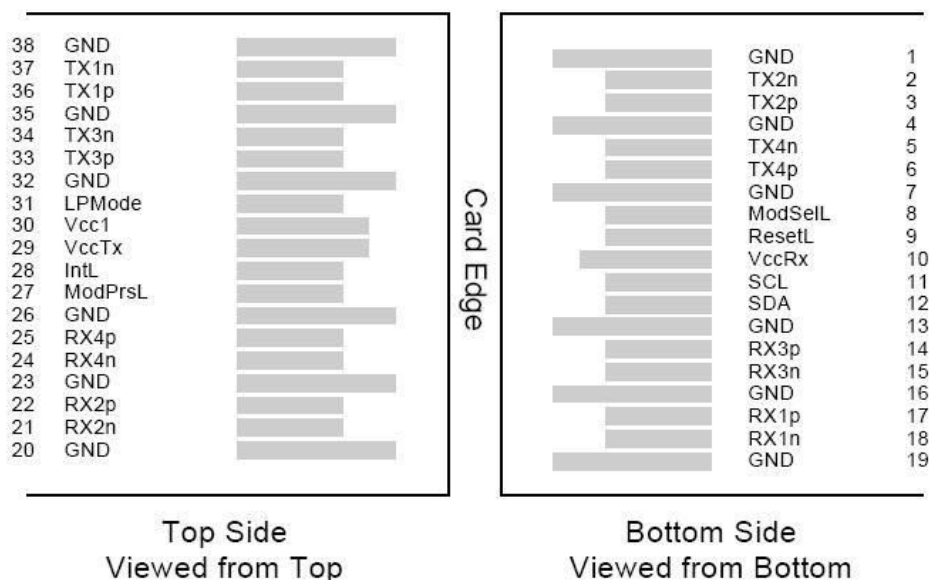


Figure 2: Pin Definitions

Pin	Logic	Symbol	Name/Description	Note
1		GND	Ground	1
2	CML-I	Tx2n	Transmitter Inverted Data Input	
3	CML-I	Tx2p	Transmitter Non-Inverted Data output	
4		GND	Ground	1
5	CML-I	Tx4n	Transmitter Inverted Data Input	
6	CML-I	Tx4p	Transmitter Non-Inverted Data output	
7		GND	Ground	1
8	LVTLL-I	ModSelL	Module Select	
9	LVTLL-I	ResetL	Module Reset	
10		VccRx	+ 3.3V Power Supply Receiver	2
11	LVC MOS-I/O	SCL	2-Wire Serial Interface Clock	
12	LVC MOS-I/O	SDA	2-Wire Serial Interface Data	
13		GND	Ground	1
14	CML-O	Rx3p	Receiver Non-Inverted Data Output	
15	CML-O	Rx3n	Receiver Inverted Data Output	
16		GND	Ground	1
17	CML-O	Rx1p	Receiver Non-Inverted Data Output	
18	CML-O	Rx1n	Receiver Inverted Data Output	
19		GND	Ground	1

20		GND	Ground	1
21	CML-O	Rx2n	Receiver Inverted Data Output	
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	
23		GND	Ground	1
24	CML-O	Rx4n	Receiver Inverted Data Output	1
25	CML-O	Rx4p	Receiver Non-Inverted Data Output	
26		GND	Ground	1
27	LVTTL-O	ModPrsL	Module Present	
28	LVTTL-O	IntL	Interrupt	
29		VccTx	+3.3 V Power Supply transmitter	2
30		Vcc1	+3.3 V Power Supply	2
31	LVTTL-I	LPMode	Low Power Mode	
32		GND	Ground	1
33	CML-I	Tx3p	Transmitter Non-Inverted Data Input	
34	CML-I	Tx3n	Transmitter Inverted Data Output	
35		GND	Ground	1
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input	
37	CML-I	Tx1n	Transmitter Inverted Data Output	
38		GND	Ground	1

Notes:

1. GND is the symbol for signal and supply (power) common for QSFP modules. All are common within the QSFP module and all module voltages are referenced to this potential otherwise noted. Connect these directly to the host board signal common ground plane
2. Vcc Rx, Vcc1 and Vcc Tx are the receiver and transmitter power suppliers and shall be applied concurrently. Recommended host board power supply filtering is shown below. Vcc Rx, Vcc1 and Vcc Tx may be internally connected within the QSFP transceiver module in any combination. The connector pins are each rated for a maximum current of 500mA.

2 - wire Management Interface

The transceivers provide management two - wire interface and the management memory map is specified by SFF - 8436.

EEPROM Map


Device 0xA0			
Address (Dec)	Value (Hex)	Name of Field (as per SFF-8436)	Description of data code
0	11	ID and status	11h= QSFP28
1-2	01 02	Status	01h 02h=Digital state of the IntL Interrupt output pin
3-21	00	Interrupt Flags	00h = not specified
22-33	00	Module Monitors	00h = not specified
34-81	00	Channel Monitors	00h = not specified
82-85	00	Reserved	00h = not specified
86-97	00	Control	00h = not specified
98-99	00	Reserved	00h = not specified
100-106	00	Module and Channel Mask	00h = not specified
107-118	00	Reserved	00h = not specified
119-122	00	Password Change Entry Area (Optional)	00h = not specified
123-126	00	Password Entry Area (Optional)	00h = not specified
127	00	Page Select Byte	00h = not specified
128	11	Identifier	11h= QSFP28
129	00	Ext. Identifier	00h = Power Class 1, No CLEI, No CDR
130	21	Connector	21h = Copper pigtail
131	80	Transceiver Reserved	80h=Reserved
132	00		00h = not specified
133	00		00h = not specified
134	00		00h = not specified
135	00		00h = not specified
136	00		00h = not specified
137	00		00h = not specified
138	00		00h = not specified
139	00		Encoding
140	FF	Nominal bit rate (unit: 100M bps)	FFh= 25500MBs
141	00	Reserved	00h = not specified
142	00	Length(SMF)	00h = not specified
143	00	Length (E-50µm)	00h = not specified
144	00	Length (50 µm)	00h = not specified
145	00	Length (62.5 µm)	00h = not specified
146	01	Cable Length(Copper)	01h=Copper Length 1M
147	A0	Device Tech	A0h = Copper Unequalized
148-163	31 30 47 74 65 6B 20...	Vendor name	10Gtek
164	1F	Extended Transceiver Codes	1Fh=EDR/QDR/DDR/SDR Support

165	00	Vendor OUI[0]	10Gtek OUI Code
166	00	Vendor OUI[1]	
167	00	Vendor OUI[2]	
168	43	Vendor PN	CAB-ZQP/2ZQP-P1M
169	41		
170	42		
171	2D		
172	5A		
173	51		
174	50		
175	2F		
176	32		
177	5A		
178	51		
179	50		
180	2D		
181	50		
182	31		
183	4D		
184-185	30 31	Vendor Rev	30h 31h=01
186-187	00	Wavelength or Copper cable	00h = not specified
188-189	00	Attenuation	00h = not specified
190	46	Max Case Temperature	46h= 70°C
191	Check Sum	Check Code for Base ID Fields	Fill in Check Sum
192	0B	Link Codes	0Bh = 100GBASE-CR4
193 -195	00	Options	00h = not specified
196-211	51 31 37 30 31 30 30 30 31 30 30 31	Vendor SN	Q17010001001
212-219	31 37 30 31 30 31	Date Code	170101
220	00	Diagnostic Monitoring Type	00h = not specified
221	00	Enhanced Options	00h = not specified
222	67	BR, Nominal(unit: 250M bps)	67h = 25.75G
223	Check Sum	Check code for Extended ID fields	Fill in Check Sum
224-255	00	Vendor Specific ID Fields	00h = not specified

Mechanical Specifications

Parameter	Mechanical			Unit
	Minimum	Typical	Maximum	
Cable Diameter (26AWG)		0.220		Inches
Bend Radius (26AWG)	1.102			Inches
Cable Diameter (28AWG)		0.185		Inches
Bend Radius (28AWG)	0.925			Inches
Cable Diameter (30 AWG)		0.181		Inches
Bend Radius (30 AWG)	0.906			Inches
Within Pair Skew			100	ps/10m
Cable Insertion Loss		29.77		dB/5m
Bulk Cable Time Delay			5.2	ns/m
Bulk Cable Impedance	95	100	105	Ohms
Insertion Force	/		40	N
Withdrawal Force	/		30	N
Retention Force	90		/	N
Durability	50 Cycles		/	/

Mechanical Dimensions

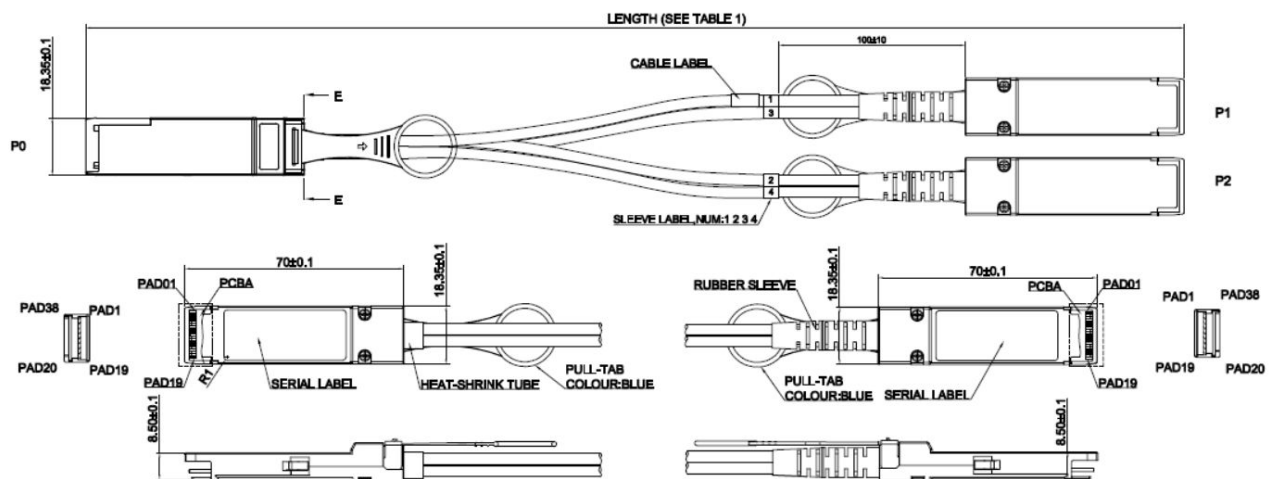

Ordering Information

100G QSFP28 to 2x 50G QSFP28 Copper Breakout Cable Assemblies, Passive

Length	Data Rate	P/N	AWG	Length Tolerance
1m	100G	CAB-ZQP/2ZQP-P1M	28 / 30	+1/-0cm
1.5M	100G	CAB-ZQP/2ZQP-P1.5M	28 / 30	+3/-3cm
2M	100G	CAB-ZQP/2ZQP-P2M	28 / 30	+3/-3cm
2.5M	100G	CAB-ZQP/2ZQP-P2.5M	28 / 30	+3/-3cm
3M	100G	CAB-ZQP/2ZQP-P3M	28 / 30	+3/-3cm
5M	100G	CAB-ZQP/2ZQP-P3M	26	+6/-6cm

Revision History

Revision	Initiated	Review	Approved	Revision History	Release Date
V1.0	Vinson	Steven	Nicky	Released.	Apr/2016
V1.1	Vinson	Steven	Nicky	Released.	Sep/2017

Further Information

For further information, please contact

Tel : +86 769 8978 3666

Web: www.oikwan.com.cn