
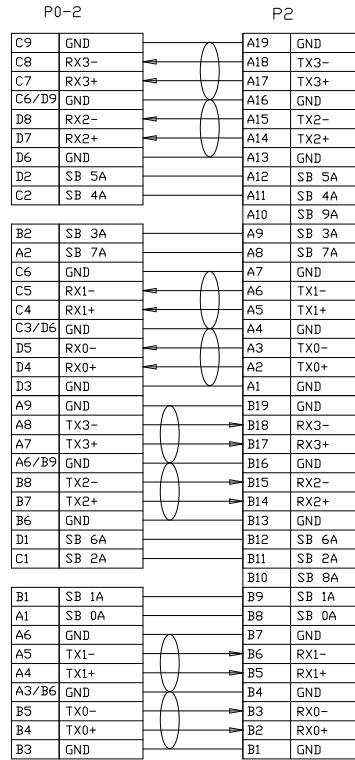


TEST CONDITIONS:
 1.100% OPEN & SHORT & MISS-WIRING & INTERMITTENCE TEST
 2.CONDUCTIVE RESISTANCE: 3Ω MAX
 3.INSULATION RESISTANCE: 10 MΩ
 4.HI-POT TEST: 300VDC FOR 10ms.

13	Plastic	Polyurethane hot-melt adhesives PA	A/R	g
12	Rear plug	MINI SAS HD 4I PC BLACK,外壳后塞	1	PCS
11	Subject	MINI SAS HD 4I PC BLACK,外壳主体	1	PCS
10	PCB	MINI SAS HD 8643 PCB<C/D>,100±10 ohm	1	PCS
9	PCB	MINI SAS HD 8643 PCB<A/B>,100±10 ohm	1	PCS
8	Woven nets	Woven nets, BLACK ,PET DD10mm	A/R	M
7	Acetate tape	Acetate tape,W=25±5mm,BLACK	A/R	M
6	Plastic	BLACK PBT-RG30New raw materials +30%GF	A/R	g
5	Plastic	LD PE The material is transparent	A/R	g
4	PCB	SLIMSAS 4I 38P PCB, 85±10 ohm	1	PCS
3	Shrapnel	Stainless steel shrapnel, 10°	1	PCS
2	Wire rod	UL1007 30AWG<SB>DD:0.7mm,	A/R	M
1	Wire rod	SAS CABLE :32AWGx2C+2D+AL+amylayPrinting,DD:0.62x1.52,85±5 ohm	A/R	M
NO.	Name	Description	Q'TY	UNITS

TOLERANCE			OIKWAN® DONGGUAN AIQUN INDUSTRIAL CO., LTD	
INCHES		M/M		
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05		
SCALE	NONE		REV	A0
UNIT	MM			
SHEET	1/2	COSTOMER:		
DATE	22/08/02	DWG NO.:AQ22-0214A		
APPD BY		TITLE: MINISAS HD 8I TO 2* SLIMSAS 4I		
P/N:	AMSB90010002	CUSTOMER. P/N:		

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

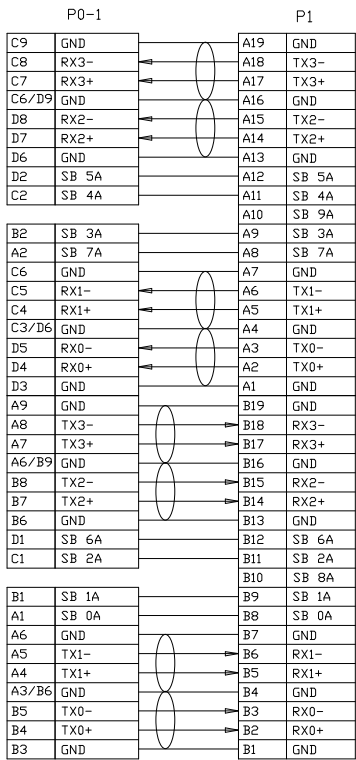

TOLERANCE							
INCHES		M/M					
.X	.015	.30	DIKWAN ® DONGGUAN AIQUN INDUSTRIAL CO., LTD				
.XX	.010	.10					
.XXX	.005	.05					
DRAWN BY	TONY CHAN		SCALE	NONE		REV	A0
CHECK BY	LJF		UNIT	MM		COSTOMER:	
APPD BY			SHEET	2/2	DATE		
P/N: AMSB90010002			DATE	22/08/02	DWG NO.: AQ22-0214A		
			TITLE: MINISAS HD 8I TO 2* SLIMSAS 4I		CUSTOMER. P/N:		