


- ELECTRICAL CHARACTER:
- a. 100% OPEN&SHORT TESTING;
 - b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
 - c. INSULATION RESISTANCE:10M Ohm(Min);
 - d. CONDUCTIVE RESISTANCE:2 Ohm(Max).

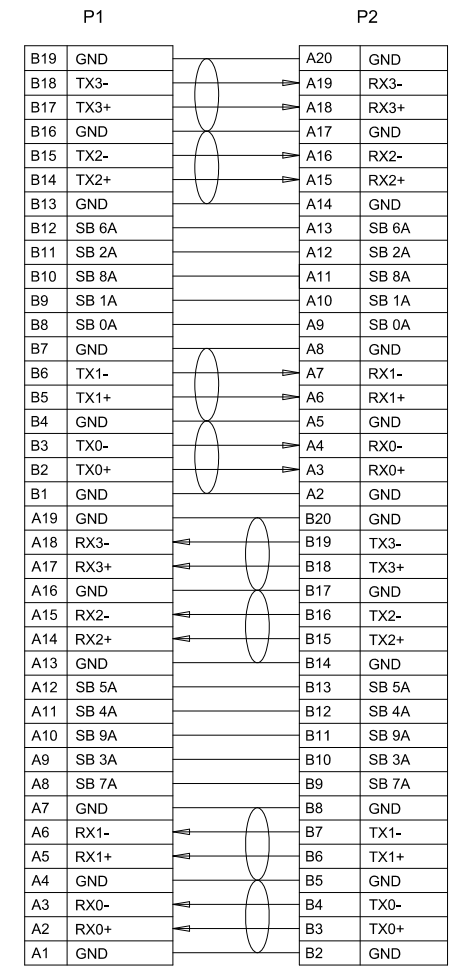

12	CONN	AQ-3-MS51C02	OCULINK 4I CONN PIN:AU 15u	1	PCS
11	PCB	AQ-3-MS31022	OCULINK 4I PCB 88±8 ohm	1	PCS
10	HOOK	AQ-3-MS64002	OCULINK 4I HOOK_UP PC+ABS, BLACK	1	PCS
9	HOOK	AQ-3-MS64001	OCULINK 4I HOOK_DOWN PC+ABS, BLACK	1	PCS
8	LATCH	AQ-3-MS21008	STAINLESS STEEL	1	PCS
7	EXPANDO	AQ-3-MS76001	PET BALCK OD: 10mm	A/R	mm
6	ACETATE TAPE	AQ-3-MS77001	W=25±5mm,BLACK	A/R	mm
5	MOLDING	AQ-3-GL100101	LDPE,NATURAL	A/R	
4	MOLDING	AQ-3-GL100401	PBT+30GF% BLACK	A/R	
3	PCBA	AQ-3-MS31019	SLIMSAS 4I 38PIN PCB, PIN:15u&30u Au, 88±8 ohm	1	PCS
2	CABLE	AQ-3-MS40101	30AWG CABLE,OD:0.65	A/R	mm
1	CABEL	AQ-3-MS40208	(32AWG*2C+2D)AL+MYLAR,OD:0.65*1.54MM,85±5 ohm.	A/R	mm
NO.	PART NAME	PART NO.	SPEC DESCRIPTION	QT'Y	UNIT

TOLERANCE			OIKWAN * DONGGUAN AIQUN INDUSTRIAL CO., LTD.				
INCHES		M/M	SCALE	NONE		REV	A0
.X	.015	.30	UNIT	MM			
.XX	.010	.10	SHEET	1/1	COSTOMER:		
.XXX	.005	.05	CHECK BY	DATE	16/07/02	DWG NO.:AQ1607-0214A	
			APPD BY	TITLE: SLIMSAS 4I TO OCULINK 4I			
			P/N: AMS980010005				